


Overview

HPE SimpliVity 2600

The HPE SimpliVity 2600 solution dramatically simplifies IT by combining infrastructure and advanced data services for virtualized workloads into a building block that delivers server, storage, and storage networking services. It also delivers a complete set of advanced functionalities that enables dramatic improvements to the efficiency, management, protection, and performance of virtualized workloads at a fraction of the cost and complexity of today's traditional infrastructure stack.

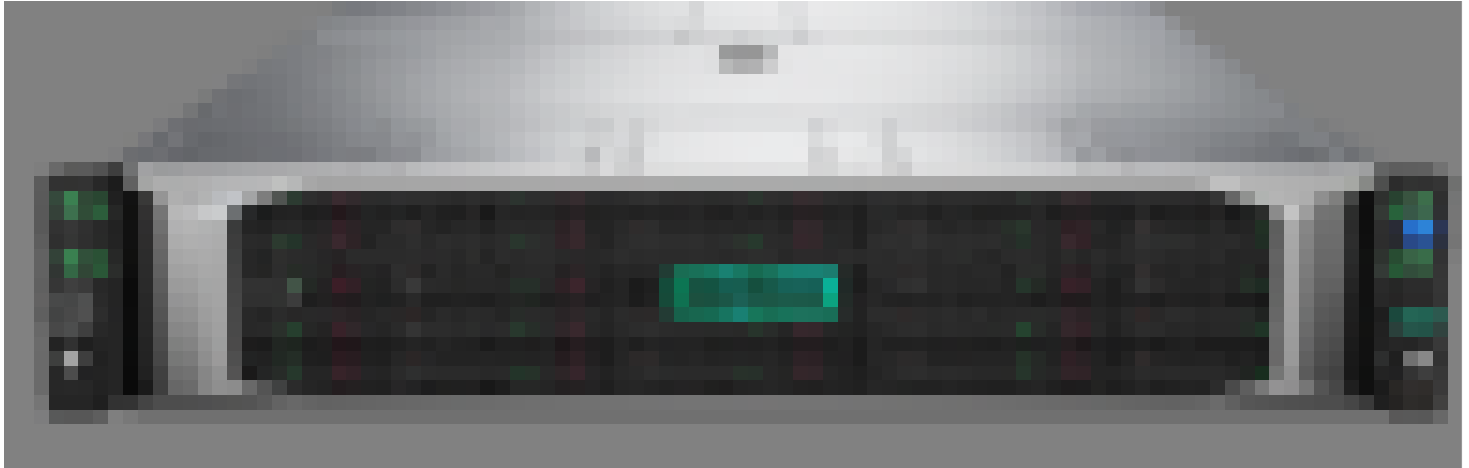

What's New

- General-purpose Virtualization & VDI Optimized Hyperconverged Solution
- Supports up to four individual server nodes in each 2U chassis for 4x more density
- HPE SimpliVity now supports 16 node stretch cluster scale (8+8), in addition to recently expanded scale up to 16 nodes per cluster and up to 48 clusters per federation
- Increased feature functionality for HTML 5 vSphere plugin
- Orchestrated upgrades of SimpliVity software, and hypervisor
- Supports up to four individual server nodes in each 2U chassis for 4x more density

Scalable and Configurable

- Processor - Choice of 1-2P Intel® Xeon® 8-24 Core Scalable Processors
- Memory - 128GB - 768GB
- Network - 10/25Gb, 1Gb
- Power - Redundant
- Virtualization Software and Licensing
- All in a compact 2U form factor

NOTE: Single cluster support up to 16 nodes, single federation support up to 96 nodes, and 48 clusters in one federation

NOTE: VDI Optimized Hyperconverged Solution only supports memory in the range: 192GB - 768GB

Overview

Software Features

- VMware vSphere
- HPE SimpliVity management plugin for VMware vCenter
- Optional Data Encryption support
- Optional RapidDR support

NOTE: The HPE SimpliVity 2600 supports VMware vSphere 6.5 and 6.7

NOTE: For VMware and HW compatibility and the latest software compatibility, please see the HPE SimpliVity OmniStack Interoperability Guide

https://support.hpe.com/hpsc/doc/public/display?docLocale=en_US&docId=emr_na-a00080626en_us&withFrame

or www.hpe.com/docs/simplivity-library

Hardware Availability Features

- Cluster expansion without downtime
- Hot-pluggable SSD
- Redundant power supplies
- Integrated storage controller with battery-backed cache
- HPE ProLiant Integrated Lights-Out Advanced (iLO) 5 Remote Management

Services


- HPE Pointnext full suite of support offerings (Foundation Care, Proactive Care and Datacenter Care).
- Remote support technology to provide 24x7 secure remote support

More information is available at <http://www.hpe.com/info/SimpliVity>

NOTE: For the best support experience, HPE Pointnext Installation Services and 24x7x365 support recommended.


NOTE: 3rd party software licenses not included

Hardware Overview

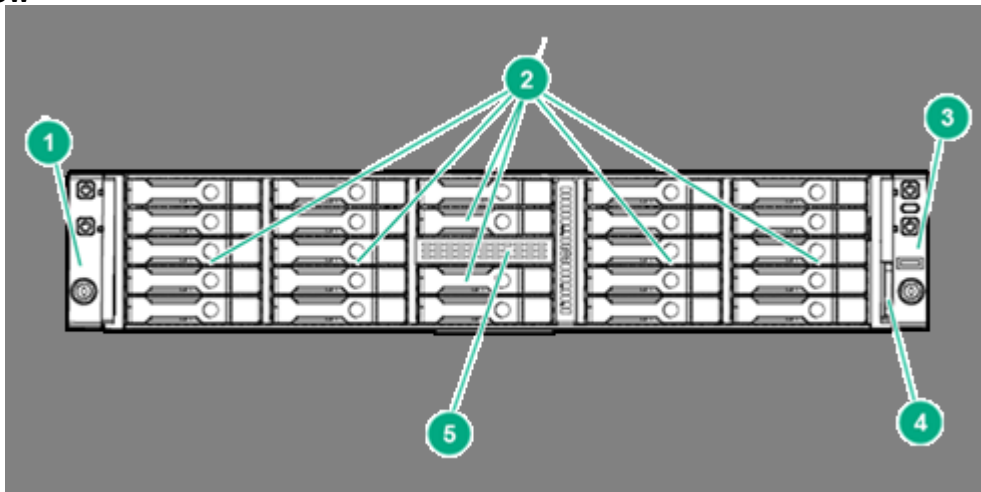

1. Left bezel ear
2. SFF hot-plug drives
3. Right bezel ear
4. Chassis serial label pull tab
5. Non-removable bezel blank

Overview

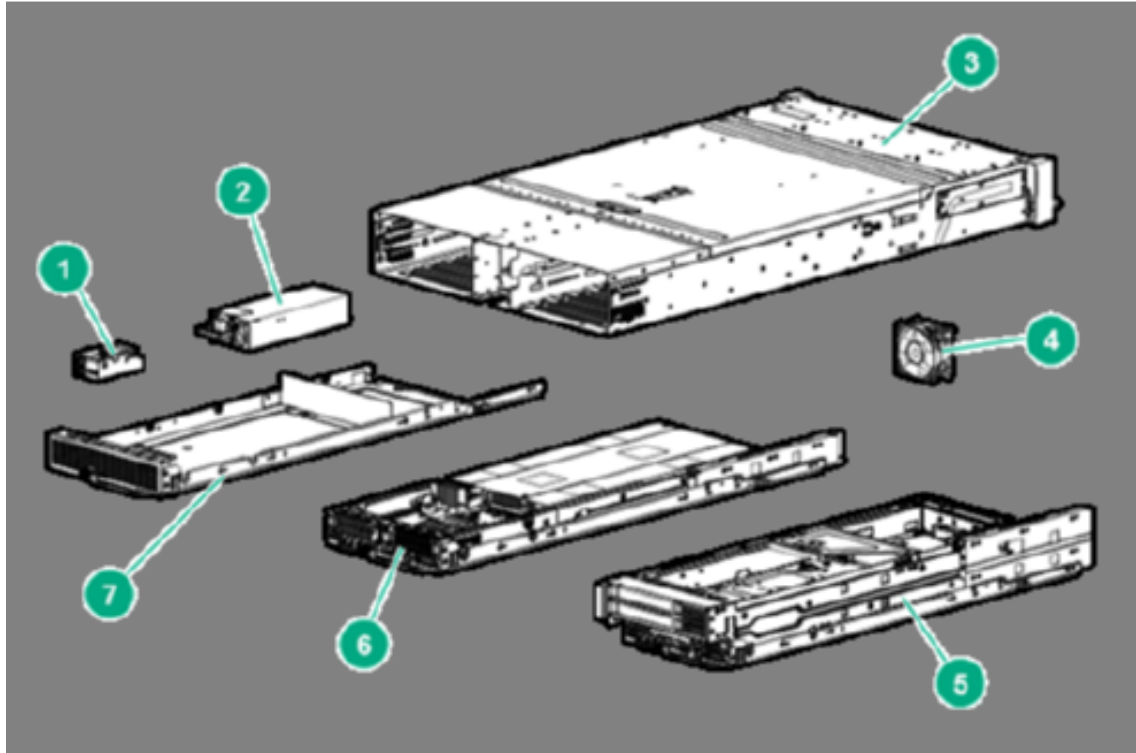

1. RCM module (optional)
2. Power Supply
3. HPE SimpliVity 2600 Chassis
4. Chassis Fan
5. HPE SimpliVity 190
6. HPE SimpliVity 170
7. Server tray blank

Standard Features

HPE SimpliVity 2600

At-a-Glance

Chassis Size	2U; Up to 4 nodes per chassis
System Fans	Ships standard with 4 single rotor fan modules, an additional 4 can be added for redundancy.
Processors	2x Intel® Xeon® Scalable Processors 8 to 24 cores selectable
Memory	128GB to 768GB per node selectable
Storage	480GB M.2 SSD boot device per node 6 x 1.92TB SSD Kit (1 kit per node)
Network Ports	Dual port 1GbE Media Module Adapter (standard) Dual port 10/25GbE PCIe NIC (default) Quad port 1GbE PCIe NIC (optional)
Power Supplies	Dual power supplies provide highly available power HPE 1600W FlexSlot Platinum Hot Plug LH Power Supply Kit (standard) HPE 1800W - 2200W FlexSlot Platinum Hot Plug LH Power Supply Kit (optional) HPE 800W FlexSlot Hot Plug LH Power Supply Kit (48VDC, 110V, 110V/220V models optional)
Hardware Warranty¹	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response
Hardware Support	3-year HPE SimpliVity 2600 solution support (required)

NOTE¹: Warranty for SSDs is subject to maximum usage limitations. Maximum usage limit is the maximum amount of data that can be written to the drive. Drives that have reached this limit will not be eligible for replacement.

NOTE: VDI Optimized Hyperconverged Solution only supports memory in the range: 192GB - 768GB

Features and Benefits

Superior User Experience

The HPE SimpliVity 2600 enables high performance even at high user density. It eliminates the performance impact of client login storms, delivering a superior user experience through unmatched client virtualization performance.

The HPE SimpliVity 2600 brings hyperconvergence to the edge. The compact form factor is ideal for virtualized workloads in space-constrained environments.

Linear Scalability from Pilot to Production

The HPE SimpliVity 2600 delivers a scale-out architecture which reduces initial capital expense and tightly aligns investments with business requirements.

Allows building blocks to be added incrementally, providing a massively-scalable pool of shared resources.

Enterprise-grade Data Protection and Resiliency for Virtualization Workloads

The HPE SimpliVity 2600 provides built-in backup and disaster recovery capabilities for the entire client virtualization infrastructure, as well as for supporting management workloads.

The solution enables a resilient, highly available, desktop operations and the ability to withstand node failures with no loss of desktops and minimal increase in latency.

Automate disaster recovery with HPE SimpliVity RapidDR

HPE SimpliVity RapidDR simplifies and accelerates off-site DR through automation. The solution extends the inherent data efficiencies of HPE SimpliVity hyperconverged infrastructure, slashing recovery point objectives (RPOs) and recovery time objectives (RTOs) from days or hours to minutes.

Standard Features

Software Overview

Pre-integrated software

- HPE SimpliVity Startup Wizard

Virtualization Platform Software and Licenses

- VMware vSphere installation is performed by HPE when ordering the HPE SimpliVity 2600
- Valid licenses for the following VMware software components are available when ordering the HPE SimpliVity 2600
 - (2) VMware vSphere licenses per node depending on CPU count
 - (1) VMware vCenter license

NOTE: The HPE SimpliVity 2600 supports VMware vSphere 6.5 and 6.7

NOTE: For VMware and HW compatibility, please see the HPE SimpliVity OmniStack Interoperability Guide

https://support.hpe.com/hpsc/doc/public/display?docLocale=en_US&docId=emr_na-a00080626en_us&withFrame

or www.hpe.com/docs/simplivity-library

NOTE: HPE SimpliVity 2600 for VMware vSphere requires valid VMware vSphere, and vCenter licenses. VMware licenses should only be removed from the order if it is confirmed that the end-customer has a valid license in place (Enterprise License Agreement (ELA), vCloud Air Partner or unused Enterprise Purchasing Program tokens).

Purchasing VMware licenses from Hewlett Packard Enterprise allows Hewlett Packard Enterprise to be the single point of contact for the entire solution inclusive of the virtualization software and is recommended.

Management

- VMware vCenter
- HPE SimpliVity management plugin for VMware vCenter

NOTE: The HPE SimpliVity 2600 supports VMware vCenter 6.5 and 6.7

NOTE: For VMware and HW compatibility, please see the HPE SimpliVity OmniStack Interoperability Guide

https://support.hpe.com/hpsc/doc/public/display?docLocale=en_US&docId=emr_na-a00080626en_us&withFrame

or www.hpe.com/docs/simplivity-library

Service and Support

Service and Support

Services for customers purchasing from Hewlett Packard Enterprise or an enterprise reseller are quoted using Hewlett Packard Enterprise order configuration tools.

Technology Services for increased uptime, productivity and ROI

At HPE, our priority is to maximize your workload uptime, avoiding problems before they occur. As the experts for the HPE SimpliVity 2600, HPE Pointnext support will be your 24x7x 365 single point-of-contact for all of your support needs with HPE Pointnext Proactive Care Support. This means you can spend more time developing apps and adding value to the business rather than maintaining your infrastructure.

If there is a potential risk in your infrastructure, our remote support technology will proactively notify HPE and initiate the resolution process. If you are experiencing any issue with your solution, HPE Pointnext Proactive Care will provide you immediate access to our team of solution experts, whose first priority is to ensure your workloads are up and running, and then immediately start diagnosing the failure.

HPE Pointnext offers its full portfolio of support services. This includes Foundation Care, Proactive Care, Proactive Care Advanced and Datacenter Care. Flexible Capacity and Operational Support Services are also available.

HPE SimpliVity 2600 is supported by the power of HPE, in 30+ different languages, with local presence across 140 countries.

Please consult your HPE Sales Representative for any additional questions and support options.

Installation and Startup Services

HPE Pointnext provides a full set of installation and startup services to meet your unique requirements.

Action	Description	Part #
Hardware install service	HPE SVT 2600 Hardware Install service	HA114A1#5KV
Remote software install service	HPE SVT Remote software install service	HA124A1#5LZ
Onsite software install service	HPE SVT Onsite Software install service	HA124A1#5MF
Update your firmware and SVT/VMware software	HPE SVT Software and Firmware update service.	HA124A1#5MK

NOTE: Please contact your HPE Sales Representative for more information.

NOTE: For more information on Technology Services please visit: <https://www.hpe.com/us/en/services.html>

Warranty

This product is covered by a global limited warranty and supported by Hewlett Packard Enterprise Pointnext and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

This hardware warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge.

Service and Support

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Configuration Information

Configuration Process

Step 1: Start with HPE SimpliVity 2600 Chassis

Step 2: Select node type and quantity

Step 3: Select the hardware options to add to the base node: processors, memory, networking, power, HW options

Step 4: Auto add of storage based on node quantity

Step 5: Auto add of SW that correlates to node configuration

Step 6: Add additional software options: from the software catalog ex. RapidDR, VMware vSphere

Step 7: Select services and support

Base Chassis

Action	Description	Part
Select the base node	HPE SimpliVity for Apollo Chassis	Q9Y4
and fan kit	HPE r2x00 Gen10 Redundant Fan Module Kit	87430 B

Select Node Type and Quantity

Action	Description	Part
Select the node type	HPE SimpliVity 170r Gen10 Server	Q9Y4
and Quantity	HPE SimpliVity 190r Gen10 Server	Q9Y4

NOTE: All nodes in a single chassis must be the same type. Mixed node types are not supported in the same chassis.

NOTE: Min/Max Rules, 170r Gen10 Server (min 2, max 4). 190r Gen10 Server (min 2, max 2)

Select Hardware Options

Processors

CPU Configurations

Action	Details	Description	CP SK
aSelect single or dual CPUs	8c 2.3GHz 70W	HPE XL1x0r Gen10 Intel Xeon-Silver 4109T (2.0GHz/8-core/70W) Processor Kit	87959 B
	8c 2.3GHz 70W	HPE XL1x0r Gen10 Intel Xeon-Silver 4109T (2.0GHz/8-core/70W) FIO Processor Kit	87959 L
In the case of dual CPU: both the L21 and the B21 SKU will be included by the confiaurator	14c 1.9GHz 85W	HPE XL1x0r Gen10 Intel Xeon-Gold 5119T (1.9GHz/14-core/85W) Processor Kit	88204 B
	14c 1.9GHz 85W	Intel Xeon-Gold Special Processor Kits	88204 L
	12C 2.1GHz 85W	HPE XL1x0r Gen10 Intel Xeon-Silver 4116 (2.1GHz/12-core/85W) Processor Kit	87957 B
	12C 2.1GHz 85W	HPE XL1x0r Gen10 Intel Xeon-Silver 4116 (2.1GHz/12-core/85W) FIO Processor Kit	87957 L

Configuration Information

10C 2.4GHz 85W	HPE XL1x0r Gen10 Intel Xeon-Gold 5115 (2.4GHz/10-core/85W) Processor Kit	87957 B
10C 2.4GHz 85W	HPE XL1x0r Gen10 Intel Xeon-Gold 5115 (2.4GHz/10-core/85W) FIO Processor Kit	87957 L
8c 1.8GHz 85W	HPE XL1x0r Gen10 Intel Xeon-Silver 4108 (1.8GHz/8-core/85W) Processor Kit	87959 B
8c 1.8GHz 85W	HPE XL1x0r Gen10 Intel Xeon-Silver 4108 (1.8GHz/8-core/85W) FIO Processor Kit	87959 L
14C 2.2GHz 105W	HPE XL1x0r Gen10 Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit	87958 B
14C 2.2GHz 105W	HPE XL1x0r Gen10 Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit	87958 L
12C 2.3GHz 105W	HPE XL1x0r Gen10 Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) Processor Kit	87958 B
12C 2.3GHz 105W	HPE XL1x0r Gen10 Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) FIO Processor Kit	87958 L
12c 2.6GHz 125W	HPE XL1x0r Gen10 Intel Xeon-Gold 6126 (2.6GHz/12-core/125W) Processor Kit	87428 B
12c 2.6GHz 125W	HPE XL1x0r Gen10 Intel Xeon-Gold 6126 (2.6GHz/12-core/125W) FIO Processor Kit	87428 L
20c 2.0GHz 125W	HPE XL1x0r Gen10 Intel Xeon-Gold 6138 (2.0GHz/20-core/125W) Processor Kit	87429 B
20c 2.0GHz 125W	HPE XL1x0r Gen10 Intel Xeon-Gold 6138 (2.0GHz/20-core/125W) FIO Processor Kit	87429 L
16c 2.1GHz 125W	HPE XL1x0r Gen10 Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) Processor Kit	87428 B
8C 3.2GHz 130W	HPE XL1x0r Gen10 Intel Xeon-Gold 6134 (3.2GHz/8-core/130W) FIO Processor Kit	87429 L
14C 2.6GHz 135W	HPE XL1x0r Gen10 Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit	88066 B
14C 2.6GHz 135W	HPE XL1x0r Gen10 Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) FIO Processor Kit	88066 L
22c 2.1GHz 140W	HPE XL1x0r Gen10 Intel Xeon-Gold 6152 (2.1GHz/22-core/140W) Processor Kit	87429 B
22c 2.1GHz 140W	HPE XL1x0r Gen10 Intel Xeon-Gold 6152 (2.1GHz/22-core/140W) FIO Processor Kit	87429 L
18c 2.3GHz 140W	HPE XL1x0r Gen10 Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) Processor Kit	87428 B
18c 2.3GHz 140W	HPE XL1x0r Gen10 Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) FIO Processor Kit	87428 L
24C 2.1GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Platinum 8160 (2.1GHz/24-core/150W) Processor Kit	87429 B
24C 2.1GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Platinum 8160 (2.1GHz/24-core/150W) FIO Processor Kit	87429 L
20c 2.4GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Gold 6148 (2.4GHz/20-core/150W) Processor Kit	87429 B
20c 2.4GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Gold 6148 (2.4GHz/20-core/150W) FIO Processor Kit	87429 L
16c 2.6GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Gold 6142 (2.6GHz/16-core/150W) Processor Kit	87428 B
16c 2.6GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Gold 6142 (2.6GHz/16-core/150W) FIO Processor Kit	87428 L
12c 3.0GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) Processor Kit	87428 B

Configuration Information

12c 3.0GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) FIO Processor Kit	87428-L
8C 3.5GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Gold 6144 (3.5GHz/8-core/150W) Processor Kit	88067-B
8C 3.5GHz 150W	HPE XL1x0r Gen10 Intel Xeon-Gold 6144 (3.5GHz/8-core/150W) FIO Processor Kit	88067-L

Memory

	Details	Description	Part Number
Select Memory Kit:	4x 32GB RDIMMs	HPE SimpliVity 128G 4 DIMM Slots Memory FIO Kit	Q9Y50
1 DIMM Kit required per CPU	6x 32GB RDIMMs	HPE SimpliVity 192G 6 DIMM FIO Kit	Q8D84
	4x 64GB LRDIMMs	HPE SimpliVity 256G 4 DIMM Slots Memory FIO Kit	Q9Y57
	6x 64GB LRDIMMs	HPE SimpliVity 384G 6 DIMM FIO Kit	Q8D88

NOTE: For more information go to: <http://www.hpe.com/docs/memory-population-rules>

Storage

Action	Effective Capacity	Description	Part Number
1 Drive Kit is required per node		HPE SimpliVity 6x1.92TB SFF SSD Kit	Q9Y49
Drive Options available	7-15TB	HPE Apollo 2000 SFF Bezel Enhanced Kit	874793-B

NOTE: Effective capacity varies by dataset and is a function of realized deduplication and compression rates

Graphics Modules

Action	Description	Part Number
1 GPU is optional per SimpliVity 190 node	NVIDIA Tesla M10 Quad GPU Module	Q0J62
	HPE NVIDIA Tesla P40 24GB Computational Accelerator	Q0V80

Networking

Action	Description	Part Number
Media Module is required (does not consume a PCIe slot)	HPE Ethernet 1Gb 2-port 368FLR-T Media Module Adapter	866464-B

PCI Adapter

Action	Description	Part Number
1 Adapter per server	HPE Ethernet 1Gb 4-port 331T Adapter	647594-B

Configuration Information

must be added, up to 1 additional adapter may be selected when ordering 190 servers	HPE Ethernet 1Gb 4-port 366T Adapter HPE Ethernet 10Gb 2-port 530SFP Adapter HPE Ethernet 10Gb 2-port 530T Adapter HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter	811546-B; 652503-B; 656596-B; 817753-B;
---	--	--

Power Supplies

Action	Description	Part
Two	HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B;
matched	HPE 1800W-2200W Flex Slot Platinum Hot Plug Power Supply Kit	876935-B;
power	HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B;
supplies are	HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B;
required.	HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B;
	HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B;

NOTE: The power supply requirement can vary based configuration and environment. Please refer to HPE Power Advisor for proper power sizing.

NOTE: 1600W power supply ships with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A).. If a different power cord is required, please check the ProLiant Power Cables web page.

<https://h20195.www2.hpe.com/v2/getpdf.aspx/4AA6-6836ENW.pdf>

NOTE: 1800W - 2200W power supply requires the selection of a C15/C16 cord per power supply.

Power Cords

Action	Description	Part
Additional power options are available	HPE C13 - BS-1363A UK/HK/SG 250V 10Amp 1.83m Power Cord	AF57
	HPE C13 - C14 WW 250V 10A Gray 0.7m Jumper Cord	A0KC
	HPE C15 US 125V 15Amp 2.5m Black Power Cord	Q7F4
	HPE C15 EU 250V 10Amp 2.5m Black Power Cord	Q7F4
	HPE C15 UK 250V 10Amp 2.5m Black Power Cord	Q7F4
	HPE C15 CN 250V 10Amp 2.5m Black Power Cord	Q7F5
	HPE C15 US 250V 10Amp 2.5m Black Jumper Cord	Q7F5
	HPE C15 EU 250V 10Amp 2.5m Black Jumper Cord	Q7F5
	HPE C15 US 250V 10Amp 0.76m Black Jumper Cord	Q7F5
	HPE C15 EU 250V 10Amp 0.76m Black Jumper Cord	Q7F6
	HPE C15 US 250V 10Amp 1m Black Jumper Cord	Q7F6
	HPE C15 EU 250V 10Amp 1m Black Jumper Cord	Q7F6
	HPE 1.83m C13-NEMA 6-15P Power Cord	SK79
	HPE C13-C14 IN 250V 10Amp 2m Black Jumper Cord	R1C6
	HPE C15-C14 IN 250V 10Amp 2.5m Black Jumper Cord	R1C6
	HPE C15-C14 IN 250V 10Amp 1m Black Jumper Cord	R1C6
	HPE C13 - BS-1363A UK/HK/SG 250V 10Amp 1.83m Power Cord	AF57
	HPE C13 - C14 WW 250V 10A Gray 0.7m Jumper Cord	A0KC
	HPE C15 US 125V 15Amp 2.5m Black Power Cord	Q7F4
	HPE C15 EU 250V 10Amp 2.5m Black Power Cord	Q7F4

NOTE: For more information on HPE server components, review the QuickSpecs at:

<https://www.hpe.com/us/en/servers/server-options.html>

Configuration Information

Action	Description	Part
IT Rack Enclosures	HPE 42U 600mmx1075mm G2 Kitted Advanced Pallet Rack with Side Panels and Baying	P9K01
All G2 Advanced and G2 Enterprise models are compatible. Rack Options Listed.	HPE 42U 600mmx1075mm G2 Kitted Advanced Shock Rack with Side Panels and Baying	P9K01
	HPE 42U 600mmx1200mm G2 Kitted Advanced Pallet Rack with Side Panels and Baying	P9K01
	HPE 42U 600mmx1200mm G2 Kitted Advanced Shock Rack with Side Panels and Baying	P9K10
	HPE 42U 600mmx1075mm G2 Enterprise Pallet Rack	P9K31
	HPE 42U 600mmx1075mm G2 Enterprise Shock Rack	P9K31
	HPE 42U 600mmx1200mm G2 Enterprise Pallet Rack	P9K31
	HPE 42U 600mmx1200mm G2 Enterprise Shock Rack	P9K41
	HPE SL Advanced Power Manager Distribution Module Kit	620002-B
	HPE Strap t2500 Shipping Bracket	740713-B
HPE 2U Shelf-Mount Adjustable Rail Kit	822731-B	

NOTE: HPE Apollo 2000 Gen10 Chassis- The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. For maximum cooling, HPE racks are recommended to allow these racks to be fully loaded with servers using the latest processors. For detail information please see Apollo 2000 System User Guide

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment.

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels will result in improper cooling that can lead to thermal damage.

NOTE: For more information on HPE rack enclosures, review the QuickSpecs at:

<https://www.hpe.com/us/en/product-catalog/servers/server-racks.hits-12.html>.

KVM Switches and Consoles	HPE 36pin Serial/USB/VGA Dongle Cord Kit	676277-B
----------------------------------	--	----------

NOTE: Dongle required for direct (non-iLO) KVM access. Each cable provides access to one server, at least 1 per chassis is recommended.

NOTE: For more information on KVM switches, review the QuickSpecs at:

<https://www.hpe.com/us/en/product-catalog/servers/kvm-switches-and-consoles>

Power Distribution Units (PDU)	HPE G2 Basic 3.6kVA/IEC C20 Detachable 16A/100-240V Outlets (20) C13 (2) C19/Vertical WW PDU	P9Q31
	HPE G2 Metered 3.6kVA/IEC C20 Detachable 16A/100-240V Outlets (12) C13/1U Horizontal WW PDU	P9R51
	HPE G2 Metered/Switched 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	P9S11
	HPE G2 Metered/Switched 7.3kVA/60309 3-wire 32A/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	P9S11

Configuration Information

NOTE: For more information on HPE PDU models and accessories, review the quickspec at:

<https://www.hpe.com/us/en/product-catalog/servers/power-distribution-units>

Additional Server Options

Action	Description	Part
Additional hardware options are available	HPE Trusted Platform Module 2.0 Gen10 Option	864279-B
	HPE Gen10 TPM 1.2 FIO Setting	872108-B
	HPE 36pin Serial/USB/VGA Dongle Cord Kit	676277-B
	HPE Gen10 2U Bezel Kit	867809-B
	HPE Bezel Lock Kit	875519-B
	HPE Advanced Power Manager Kit	741192-B
	HPE Apollo 2000 Rack Consolidation Module Kit	798211-B
	HPE Apollo 2000 Rack Consolidation Module 2.0-1.0 Adapter Kit	800063-B

HPE OmniStack Software

Action	Description	Part
Based on the hardware configurations in step 1 & 2 the appropriate software will be included by the configurator.	HPE OmniStack 2P Virtual Desktop Infrastructure SW	Q9Y5
	HPE OmniStack 1P Remote Office Branch Office SW	Q9Y5
The software is determined by CPU and storage configuration and is required	HPE OmniStack 2P Remote Office Branch Office SW	Q9Y5

Configuration Information

VMware Software

vSphere

NOTE: The HPE SimpliVity 2600 supports VMware vSphere 6.5 and 6.7

NOTE: For VMware and HW compatibility, please see the HPE SimpliVity OmniStack Interoperability Guide

https://support.hpe.com/hpsc/doc/public/display?docLocale=en_US&docId=emr_na-a00080626en_us&withFrame

or www.hpe.com/docs/simplivity-library

Action	Description	Part
A valid VMware vSphere license is required for each CPU to complete deployment.	VMware vSphere Standard 1 Processor 3yr E-LTU	BD711A/
	VMware vSphere Enterprise Plus 1 Processor 3yr Software	BD711A/
	VMware vSphere Enterprise Plus 1 Processor 3yr E-LTU	BD715A/
	VMware vSphere Remote Office Branch Office Standard 25VM 3yr E-LTU	P9A82A/
If an order is placed without VMware licenses, the user agrees to supply the necessary license.	VMware vSphere Remote Office Branch Office Advanced 25VM 3yr E-LTU	P9A85A/
	VMware vSphere Standard 1 Processor 5yr Software	BD511A/

HPE Integrated Lights Out Advanced Software (iLO Advanced)

Action	Description	Part
The HPE iLO Advanced license is required and additional options	HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD501A/
	HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64A/
	HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD501A/
	HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD501A/

Encryption Software

Action	Description	Part
The HPE Smart Array Secure Encryption License is required if optional encryption is enabled	HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU	Q2F26A/

Technical Specifications

Chassis Physical Dimensions

2U 17.64" W x 34.62" D

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
07-Oct-2019	Version 3	Changed	Overview, Standard Features, Core Information, and Technical Specifications sections were updated.
01-Oct-2018	Version 2	Changed	Overview, Standard Features, and Configuration Information sections updated.
		Added	SKUs added in Configuration Information section: 879593-B21, 879593-L21, B21, 879579-L21, 879591-B21, 87874286-L21, 874290-B21, 874290-Q9Y50A, Q0J62A, Q0V80A, 64759811546-B21, 865434-B21, 865428865414-B21, Q9Y52A, Q9Y54A, Q9Y53A, Q9Y56A, Q9Y57A.
		Removed	Obsolete SKU was deleted: J2R02
02-Jul-2018	Version 1	Created	New QuickSpecs.






[Sign up for updates](#)

© Copyright 2019 Hewlett Packard Enterprise Development LP. The information on this page is subject to change without notice. The only warranties for Hewlett Packard Enterprise services are set forth in the express warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.



Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a registered trademark of Intel Corporation. Unix is a registered trademark of The Open Group.

a00043499enw - 16191 - Worldwide - V3 - 07-October-2019