


### Overview

#### HPE ProLiant DX560 Gen10 Server

The HPE ProLiant DX560 Gen10 Server along with Nutanix provide a global partnership to deliver hyper-converged solutions in an on premise appliance or through the HPE Greenlake consumption model.. This offering will leverage Nutanix's free AHV hypervisor and Nutanix Enterprise Cloud software to provide customers with a pre-integrated and optimized solution that dramatically lowers total cost of ownership and accelerates operational productivity.

The HPE ProLiant DX560 Gen10 Server is a high-density, four-socket (4S) server with high performance, scalability and reliability, all in a 2U chassis. Supporting the latest 2<sup>nd</sup> generation Intel® Xeon® Scalable processors, the HPE ProLiant DX560 Gen10 Server offers greater processing power, up to 6 TB of faster memory, IO of up to eight PCIe 3.0 slots, up to 12 TB of HPE Persistent Memory plus the intelligence and simplicity of automated management with HPE OneView and HPE iLO 5.


The HPE ProLiant DX560 Gen10 Server is the ideal server for business critical workloads, virtualization, server consolidation, database, business processing, and general 4P data-intensive applications where data center space and the right performance are paramount.

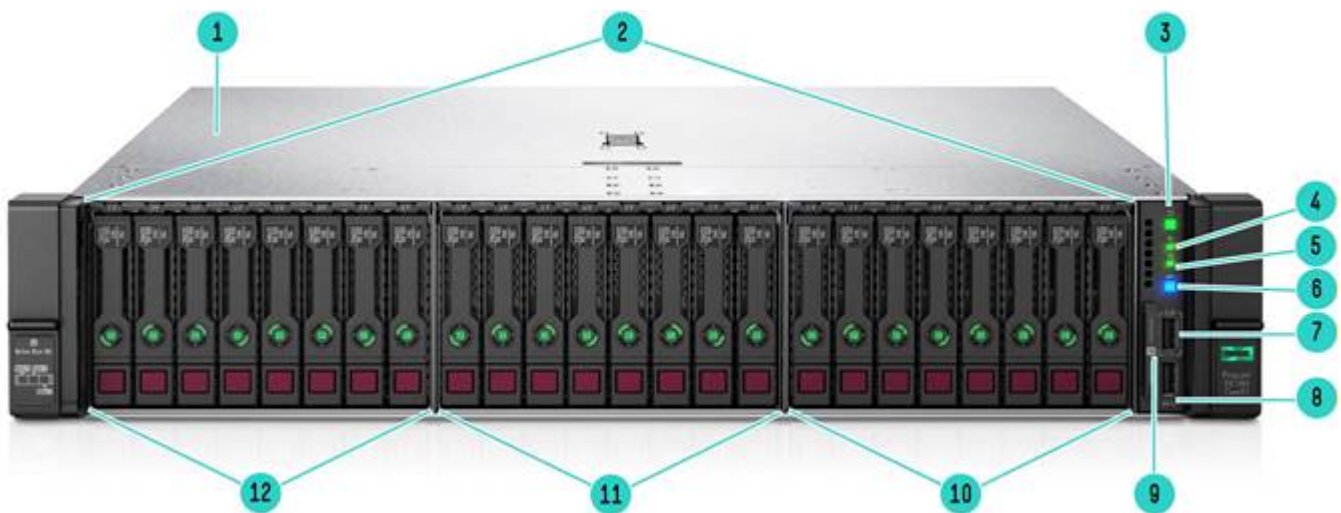

HPE ProLiant DX560 24SFF Gen10 Server - Front View

- |   |                           |
|---|---------------------------|
| 1. Quick removal access panel                                   | 7. iLO Front Service Port |
| 2. Standard 24SFF SATA/SAS drive bays in 3 - 8 drive cage boxes | 8. USB 3.0                |
| 3. Power On/Standby button and system power LED button          | 9. Serial label pull tag  |
| 4. Health LED   | 10. Drive Box 3           |
| 5. NIC status   | 11. Drive Box 2.          |
| 6. UID button   | 12. Drive Box 1           |


### Overview

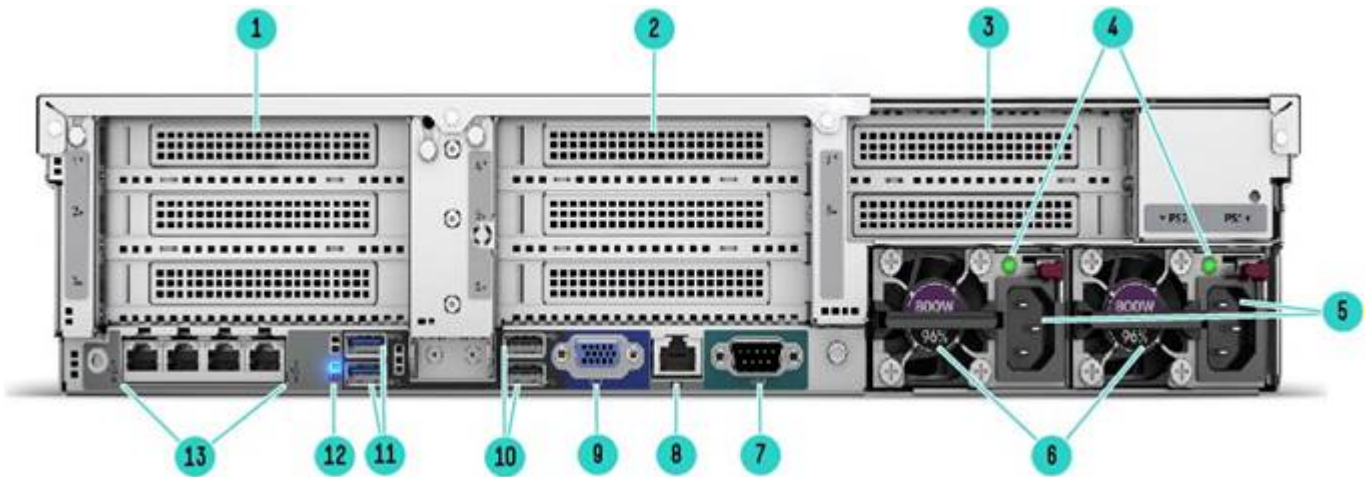

**Rear View - HPE ProLiant DX560 Gen10 Server**

- |  |  |
|--|--|
| 1. PCIe Slots (Slots 1-3 top to bottom, riser shipped standard)  | 8. Dedicated iLO connector                   |
| 2. PCIe Slots (Slots 4-6 top to bottom, requires second riser card and second processor)   | 9. VGA (video) connector                     |
| 3. PCIe Slots (Slots 7-8 top to bottom), requires tertiary riser card and second processor, Not available with 4x Flex Slot power supplies | 10. USB connectors 2.0 (2)                   |
| 4. Power supply power LEDs   | 11. USB connectors 3.0 (2)                   |
| 5. Power supply power connections  | 12. Unit ID LED                              |
| 6. HPE Flexible Slot Power Supply bay 1 and 2 (800W PS shown)  | 13. FlexibleLOM ports (Port 1 on right side) |
| 7. Serial connector  |  |

### Overview

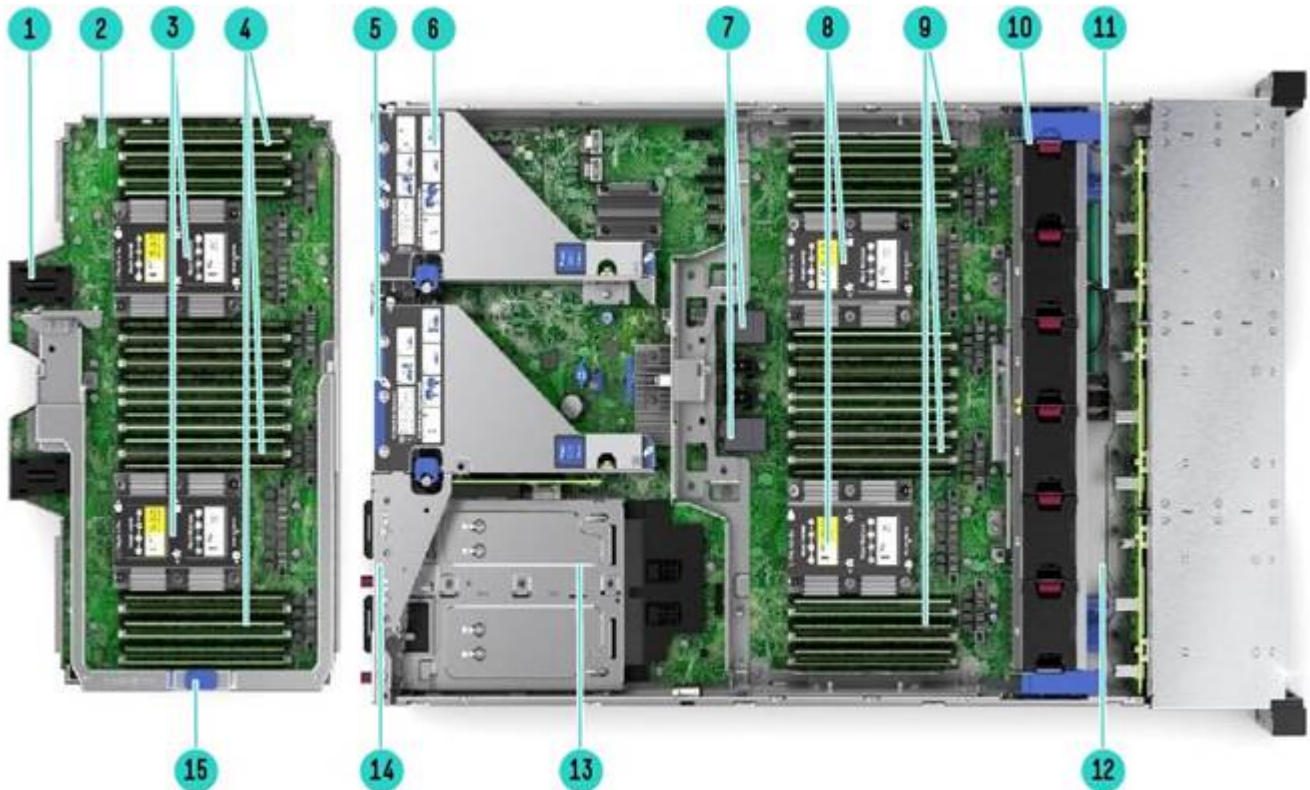

**Internal View: HPE ProLiant DX560 Gen10 Server with upper CPU mezzanine tray**

- |   |  |
|---|--|
| 1. Left connector used for DL560 4-port NVMe Mezzanine card (Daughter card)                               | 9. DDR4 DIMM slots. Shown fully populated in 24 slots (12 per processor) |
| 2. Upper CPU Mezzanine Board Kit  | 10. Fan cage shown with 6 standard Hot-plug fans                         |
| 3. 2 Processors, heatsink showing on upper CPU mezzanine board kit  | 11. HPE Smart Storage Battery 1 or HPE Smart Storage Hybrid Capacitor    |
| 4. DDR4 DIMM slots on upper CPU mezzanine board kit. Shown fully populated in 24 slots (12 per processor) | 12. HPE Smart Storage Battery 2  |
| 5. Optional secondary PCIe riser  | 13. (Under) Hot Plug redundant HPE Flexible Slot Power supplies          |
| 6. Default primary PCIe riser   | 14. Optional Tertiary riser  |
| 7. UPI connectors for upper CPU mezzanine board kit   | 15. Handle for removing upper CPU Mezzanine Board Kit                    |
| 8. 2 Processors, heatsink showing   |  |

### Overview

#### What's New

- New ProLiant DX560 24SFF Gen10 Platform
  - Qualified platforms / configs recognized by both HPE & Nutanix
  - Factory tuned & optimized HW settings for Nutanix environments
  - Factory pre-installed Nutanix AHV & AOS
- 

#### Form Factor

2U Rack Form Factor

**NOTE:** Entry, Base and Performance pre-configured models ship with Gen10 Easy Install Rail Kits and Cable Management Assembly

---

#### Chassis Types

24 SFF

---

#### System Fans

6 Hot Plug Fans (with N+1 redundancy)

**NOTE:** 6 hot plug fans are shipped as standard.

---

### Standard Features

#### Processors

One, two or four of the following depending on model.

**NOTE:** The 2nd digit of the processor model number "x1xx" and "x2xx" is used to denote the processor generation (i.e. 1=1st generation and 2=2nd generation)

**NOTE:** This table covers the public Intel offering only.

**NOTE:** For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Processor Suffix	Description	Offering
<b>L</b>	Large memory tier	Up to 4.5 TB addressable memory per socket
<b>M</b>	Medium memory tier	Up to 2.0 TB addressable memory per socket
<b>N</b>	NFV Optimized	Targeted at Network Function Virtualization (NFV) workloads. Intel® Speed Select Technology-Base Frequency improves performance by directing base frequency to high priority/bottleneck cores.
<b>S</b>	Search Optimized	Optimized base frequency to address 'search' workloads.
<b>V</b>	VM Density Optimized	Fosters enhanced VM density, allowing to support more/larger virtual machines per host.
<b>Y</b>	Speed Select	Intel® Speed Select Technology -Performance Profile increases base frequency when less cores are enabled. Allows greater flexibility, deployment options and platform longevity.

Intel Xeon Models	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI	DDR4	Memory per socket
<b>Platinum Processors - 2nd Generation Intel® Xeon® Scalable Processor Family</b>							
Platinum 8280M Processor	2.7GHz	28	38.5	205W	3 @ 10.4 GT/s	2933 MT/s	2TB
Platinum 8280 Processor	2.7GHz	28	38.5	205W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8276M Processor	2.2GHz	28	38.5	165W	3 @ 10.4 GT/s	2933 MT/s	2TB
Platinum 8276 Processor	2.2GHz	28	38.5	165W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8270 Processor	2.7GHz	26	35.75	205W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8268 Processor	2.9GHz	24	35.75	205W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8260M Processor	2.4GHz	24	35.75	165W	3 @ 10.4 GT/s	2933 MT/s	2TB

### Standard Features

Platinum 8260 Processor	2.4GHz	24	35.75	165W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8256 Processor	3.8GHz	4	16.5	105W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8253 Processor	2.2GHz	16	22	125W	3 @ 10.4 GT/s	2933 MT/s	1TB

Intel Xeon Models	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI	DDR4	Memory per socket
<b>Gold Processors - 2nd Generation Intel® Xeon® Scalable Processor Family</b>							
Gold 6254 Processor	3.1GHz	18	24.75	200W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6252 Processor	2.1GHz	24	35.75	150W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6248 Processor	2.5GHz	20	27.5	150W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6246 Processor	3.3GHz	12	24.75	165W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6244 Processor	3.6GHz	8	24.75	150W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6242 Processor	2.8GHz	16	22	150W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6240M Processor	2.6GHz	18	24.75	150W	3 @ 10.4 GT/s	2933MT/s	2TB
Gold 6240 Processor	2.6GHz	18	24.75	150W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6238M Processor	2.1GHz	22	30.25	140W	3 @ 10.4 GT/s	2933MT/s	2TB
Gold 6238 Processor	2.1GHz	22	30.25	140W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6234 Processor	3.3GHz	8	24.75	130W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6230 Processor	2.1GHz	20	27.5	125W	3 @ 10.4 GT/s	2933MT/s	1TB



### Standard Features

Gold 6226 Processor	2.7GHz	12	19.25	125W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 6262V Processor	1.9GHz	24	33	135W	3 @ 10.4 GT/s	2933MT/s	1TB
Gold 5222Processor	2.7GHz	4	16.5	105W	2 @ 10.4 GT/s	2933MT/s	1TB
Gold 5220 Processor	2.2GHz	18	24.75	125W	2 @ 10.4 GT/s	2666MT/s	1TB
Gold 5218 Processor	2.3GHz	16	22	125W	2 @ 10.4 GT/s	2666MT/s	1TB
Gold 5217 Processor	3.0GHz	8	11	115W	2 @ 10.4 GT/s	2666MT/s	1TB
Gold 5215M Processor	2.5GHz	10	13.75	85W	2 @ 10.4 GT/s	2666MT/s	2TB
Gold 5215 Processor	2.5GHz	10	13.75	85W	2 @ 10.4 GT/s	2666MT/s	1TB

**NOTE:** Platinum - 82xx series - 2 and 4 socket capable, 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2933 MT/s 1DPC, 1 TB memory capacity (up to 2 TB on 'M' SKUs and up to 4.5 TB on 'L' SKUs), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.

**NOTE:** Gold - 62xx and 52xx series - 2 and 4 socket capable, 3UPI @ 10.4 GT/s on 62xx processors, 2UPI @ 10.4 GT/s on 52xx processors, 6 Channel DDR4 @ 2933 MT/s 1DPC on 62xx and 5222 processors , 6-Channel DDR4 @ 2666 MT/s on 52xx processors, 1 TB memory capacity (up to 2 TB on 'M' SKUs and up to 4.5 TB on 'L' SKUs), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5222 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.

**NOTE:** With the current HPE DDR4 SmartMemory maximum offering (128GB LRDIMMs), the 'L' SKUs and 'M' SKUs can support up to 1.5TB per socket.

**NOTE:** More than 1.5TB per socket requires the use of HPE Persistent Memory kits : available in 512GB, 256GB and 128GB

**NOTE:** Platinum 8260Y and Gold 6240Y processors support Intel® Speed Select Technology -Performance Profile

**NOTE :** Gold 5218B processor and Gold 5218 processor have the same specifications and cannot be mixed within a server

**NOTE:** Gold 6252N, 6230N and 5218N processors are optimized for NFV (Network Function Virtualization) workloads and support Intel® Speed Select Technology -Base Frequency

**NOTE:** Gold 6262V and 6222V are VM density optimized, Gold 5220S is search-optimized

**NOTE:** 82xx, 62xx and 52xx processors offer VNNI (vector neural network instruction) instruction set.

### Standard Features

#### Chipset

Intel C621 Chipset

For more information regarding Intel® chipsets, please see the following URL:

<http://www.intel.com/products/server/chipsets/>

#### On System Management Chipset

HPE iLO 5 ASIC

Read and learn more in the [iLO QuickSpecs](#).

#### Memory

One of the following depending on model

<b>Type:</b>	SmartMemory Registered (RDIMM), Load Reduced (LRDIMM)	
<b>DIMM Slots Available</b>	48	12 DIMM slots per processor, 6 channels per processor, 2 DIMMs per channel
<b>With 2<sup>nd</sup> generation processors</b>		
<b>Maximum capacity (LRDIMM)</b>	6 TB	48 x 128 GB LRDIMM @2933 MT/s 2 DPC
<b>Maximum capacity (RDIMM)</b>	1.5 TB	24 x 64 GB RDIMM @ 2933 MT/s 1 DPC
	3 TB	48 x 64 GB RDIMM @ 2666 MT/s 2 DPC
<b>Maximum capacity (HPE Persistent Memory)</b>	12 TB	24 x 512 GB Persistent Memory Kit @2666 MT/s

#### With 1<sup>st</sup> generation processors

<b>Maximum capacity (LRDIMM)</b>	6 TB	48 x 128 GB LRDIMM @ 2666 MT/s
<b>Maximum capacity (RDIMM)</b>	1.5 TB	48 x 32 GB RDIMM @ 2666 MT/s
<b>Maximum capacity (NVDIMM)</b>	384 GB	24 x 16 GB NVDIMM @ 2666 MT/s



### Standard Features

**NOTE:** The 2933 MT/s DIMMs are only supported with the 2<sup>nd</sup> generation Intel® Xeon® Scalable processors (82xx,62xx and 52xx).

**NOTE:** The 2666 MT/s DIMMs are only supported with the 1<sup>st</sup> generation Intel® Xeon® Scalable processors (81xx,61xx and 51xx)

**NOTE:** HPE Persistent Memory is only supported on the 2<sup>nd</sup> generation processors

**NOTE:** HPE Persistent Memory operates in two modes - memory mode and app direct mode.

**NOTE:** In memory mode, DRAM acts as a cache while HPE Persistent Memory provides large memory capacity which is volatile. DRAM installed does not count towards total memory capacity.

**NOTE:** In app direct mode, data that needs to be made persistent can be routed to HPE Persistent Memory. Both DRAM and HPE Persistent Memory count towards total memory capacity.

**NOTE:** Mixing of RDIMM and LRDIMM memory is not supported.

**NOTE:** The maximum memory speed is a function of the memory type, memory configuration, and processor model.

**NOTE:** Intel memory processors (with suffix M) are needed for supporting 1.5 TB memory per socket on 1<sup>st</sup> generation processors.

**NOTE:** Intel memory processors (with suffix M or suffix L) are needed for supporting more than 1 TB memory per socket on 2<sup>nd</sup> generation processors

**NOTE:** Maximum of 6 NVDIMMs are supported per processor on the 1<sup>st</sup> generation processors

**NOTE:** NVDIMMs are not supported on the 2<sup>nd</sup> generation processors

---

### Memory Protection

For details on the HPE Server Memory Options RAS feature, visit: <http://www.hpe.com/docs/memory-ras-feature>.

---

### Standard Features

#### Expansion Slots

Primary Riser (Standard)				
Expansion Slots #	Technology	Bus/Connector Width	Form Factor/Connector	Notes
1	PCIe 3.0	x8	? length/full height	Proc 1
2	PCIe 3.0	X16	? length/full height	Proc 1
3	PCIe 3.0	x8	? length/full height	Proc 1
None	2 x M.2	SATA lanes	M.2	Chipset

Primary/Secondary Riser (Optional) 873418-B21				
Expansion Slots (Primary/Secondary) #	Technology	Bus/Connector Width	Form Factor /Connector	Notes (Primary/secondary)
None	NVMe	x8	Slimline	Proc 1/2
None	NVMe	x8	Slimline	Proc 1/2
None	NVMe	x8	Slimline	Proc 1/2
None	NVMe	x8	Slimline	Proc 1/2

Secondary Riser (Optional) 870548-B21				
Expansion Slots #	Technology	Bus Width	Form Factor	Notes
4	PCIe 3.0	x8	Half length/full height	Proc 2
5	PCIe 3.0	x16	Half length/full height	Proc 2
6	PCIe 3.0	x8	Half length/full height	Proc 2

Tertiary riser (Optional) 872253-B21				
Expansion Slots #	Technology	Bus Width	Form Factor	Notes
7	PCIe 3.0	x8	Half length/full height	Proc 2
8	PCIe 3.0	x8	Half length/full height	Proc 2

Tertiary riser (Optional) 872255-B21				
Expansion Slots #	Technology	Bus Width	Form Factor/Connector	Notes
7	PCIe 3.0	x8	Half length/full height	Proc 2
None	NVMe	x8	Slimline	Proc 2

Tertiary riser (Optional) 872257-B21				
Expansion Slots #	Technology	Bus Width	Form Factor/Connector	Notes
None	NVMe	x8	Slimline	Proc 2
None	NVMe	x8	Slimline	Proc 2

### Standard Features

Primary/Secondary Riser (Optional) 826704-B21						
Expansion Slots (Primary/Secondary) #	Technology	Bus/Connector	Width	Form Factor/Connector (Primary)	Form Factor/Connector (Secondary)	Notes (Primary/secondary)
2/5	PCIe 3.0	x16		? length/full height	Half length/full height	Proc 1/2
3/6	PCIe 3.0	x16		? length/full height	Half length/full height	Proc 1/2

Primary/Secondary Riser (Optional) 873420-B21						
Expansion Slots (Primary/Secondary)#	Technology	Bus/Connector	Width	Form Factor/Connector (Primary)	Form Factor/Connector (Secondary)	Notes (Primary/Secondary)
1/4	PCIe 3.0	x8		? length/full height	Half length/full height	Proc 1/2
2/5	PCIe 3.0	x8		? length/full height	Half length/full height	Proc 1/2
3/6	PCIe 3.0	x8		? length/full height	Half length/full height	Proc 1/2
None	NVMe	x8		Slimline	Slimline	Proc 1/2

**NOTE:** The secondary and tertiary risers need the 2<sup>nd</sup> processor to be installed.

**NOTE:** The expansion slots at the back are numbered in ascending order from top to bottom and from left to right.

**NOTE:** Some riser kits (826704-B21, 873418-B21, 873420-B21) have FIO options with separate numbers and they do not ship with riser cages. Please review the FIO section for details.

**NOTE:** For additional details on ProLiant DL Gen10 server risers please visit:

<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>.

**NOTE:** The optional 4-port NVMe Mezzanine card 874633-B21 supports a maximum of 8 NVMe drives and does not consume a PCIe slot. It goes on top of the HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) or HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21) and requires a four processor configuration.

**NOTE:** The tertiary risers can only be installed when using two PSUs. There is no space for tertiary risers when the four PSU's are installed. If a secondary riser is required it needs to be ordered separately. Please refer section HPE I/O Expansion Options.

**NOTE:** A maximum of 1 primary, 1 secondary and 1 tertiary riser can be installed in one server.

**NOTE:** Slimline riser kit (873418-B21) does not contain any additional PCIe slots.

### Storage Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

### Standard Features

#### Software RAID

HPE Smart Array S100i SR Gen10 SW RAID

**NOTE:** HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.

**NOTE:** HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please select HPE FIO Enable Smart Array SW RAID (784308-B21).

#### Essential RAID

HPE Smart Array E208i-a SR G10 LH Controller  
HPE Smart Array E208i-p SR Gen10 Controller

Maximum Internal Storage		
	Capacity	Configuration
Hot Plug SFF SATA HDD	48 TB	24 x 2 TB
Hot Plug SFF SAS HDD	58 TB	24 x 2.4 TB
Hot Plug SFF SATA SSD	184 TB	24 x 7.68 TB
Hot Plug SFF SAS SSD	367 TB	24 x 15.3 TB

Interfaces	
Serial	1 rear
Video	1 front (optional with Universal Media Bay), 1 rear
HPE iLO Remote Management Network Port	1
HPE iLO Front Service Port	1
Micro SD Slot	1 (Internal), 2 (optional, internal)
<b>NOTE:</b> Requires the optional HPE Dual Micro SD 8GB USB kit.	
USB 2.0 Ports	4 total: 2 front (optional); 2 rear
USB 3.0 Ports	5 total: 1 front; 2 rear, 2 internal
<b>NOTE:</b> 2 front (optional) USB 2.0 ports need the HPE DL560 Gen10 Universal Media Bay Kit (872267-B21).	

#### Power Supply

One of the following depending on model

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

**NOTE:** Available in 94% and 96% efficiency.

**NOTE:** Also available in -48VDC and 227VAC/380VDC power inputs.

### Standard Features

**NOTE:** Must order 4x800W Flex Slot PSU.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

**NOTE:** Available in 94% efficiency.

**NOTE:** 1600W Power supplies only support high line voltage (200VAC to 240VAC).

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (416151-B21). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#)

---

### Operating Systems and Virtualization Software Support for ProLiant Servers

Nutanix Acropolis Operating System (AOS): Version 5.10.5 and higher

Nutanix Acropolis Hypervisor (AHV): Version 2017030.279 and higher

VMware vSphere: Version 6.5, 6.7 U2

**NOTE:** The latest version of AOS and AHV are pre-installed in each server at the factory.

---

### Industry Standard Compliance

ACPI 6.1 Compliant

PCIe 3.0 Compliant

WOL Support

Microsoft® Logo certifications

PXE Support

USB 3.0 Compliant (internal); USB 2.0 Compliant (external ports via SUV)

SMBIOS 3.1

UEFI 2.6

Redfish API

**NOTE:** For additional technical thermal details regarding ambient temperatures, humidity and features support please visit:

<http://www.hpe.com/servers/ashrae>

---

### Standard Features

#### Graphics

Integrated Video Standard  
Video modes up to 1920 x 1200@60Hz (32 bpp)  
16MB Video Memory  
HPE iLO 5 on system management memory  
32 MB Flash  
4 Gbit DDR 3 with ECC protection

---

#### HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

**NOTE:** The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS.

#### UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload profiles for simple performance optimization

#### UEFI Boot Mode only:

- TPM 2.0 support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled
- iSCSI Software Initiator Support
- HTTP/HTTPs Boot support as a PXE alternative
- Boot support for option cards that only support a UEFI option ROM

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.

---

### Embedded Management

#### HPE Integrated Lights-Out (HPE iLO)

---



### Standard Features

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <http://www.hpe.com/info/ilo>.

---

### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI)

---

### Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning.

---

### iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

---

### Server Utilities

#### Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

---

#### Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

---

#### Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <https://www.hpe.com/us/en/servers/smart-update>.

---

#### iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

---

### Standard Features

#### HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit:

<http://www.hpe.com/info/ilo/mobileapp>.

---

#### RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

---

#### Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at

<http://www.hpe.com/servers/powershell>.

---

#### HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at

<http://www.hpe.com/info/oneview>.

---

#### HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at

<http://www.hpe.com/info/hpesim>.

---

#### Security

- UEFI Secure Boot and Secure Start support
  - Immutable Silicon Root of Trust
  - FIPS 140-2 validation (iLO 5 certification in progress)
  - Common Criteria certification (iLO 5 certification in progress)
  - Configurable for PCI DSS compliance
  - Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
  - Support for Commercial National Security Algorithms (CNSA)
  - Granular control over iLO interfaces
  - Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
  - Tamper-free updates - components digitally signed and verified
  - Secure Recovery - recover critical firmware to known good state on detection of compromised firmware
  - Ability to rollback firmware. Secure erase of NAND/User data
  - TPM (Trusted Platform Module) 1.2 option. TPM (Trusted Platform Module) 2.0 option Bezel Locking Kit
  - Chassis Intrusion detection option
-

### Standard Features

**NOTE:** HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode and not Legacy Mode. The Trusted Platform Module 2.0 Option can be configured to the 1.2 version through the UEFI BIOS to support TPM 1.2 functionality.

**NOTE:** HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

---

### About Trusted Platform Module

Trusted Platform Module (TPM) is a separate processor that monitors the system state. TPM is a passive component needing to be updated and not able to lock down any component in the system except access to its own memory. It also provides some cryptographic operations - among them: creating RSA key pairs, and working with them.

The first verification of signatures happens by code on the CPU, which can be intercepted and replaced. Emulating a "properly" booted system is possible by sending the right values to the TPM.

HPE supports two version of TPM, the 1.2 device and the 2.0 device. The TPM 2.0 device works with Gen10 servers that are using a Linux operating system or Microsoft Windows Server 2016. Both TPM 1.2 and 2.0 are compatible with HPE ProLiant Gen9 and Gen10 servers. These TPM modules are not compatible with server generations prior to Gen9. Once the TPM module is installed, it locks into place and cannot be removed, nor can it be replaced with a different TPM device.

---

### HPE Silicon Root of Trust

The HPE Silicon Root of Trust provides protection because as soon as the server is powered on and the iLO firmware comes alive, it looks into the silicon for the immutable fingerprint that verifies all the firmware code is valid and uncompromised. Over a million lines of firmware code run, before the operating system starts, making it essential to confirm that all server essential firmware is free from malware or compromised code.

Silicon Root of Trust is included with iLO5 Standard with all platforms that contain the iLO5 chip. That includes ML, DL, Apollo, C-Class Blades, and Synergy Compute Modules. HPE Cloudline and the HPE Microserver do not have silicon root of trust, since they do not contain an iLO5 silicon chip. This technology is NOT available on any previous version of HPE ProLiant like the Gen9, Gen8, or Gen 7 servers, nor can those previous generations be retrofitted to accommodate the silicon root of trust.

The silicon validates the iLO 5 firmware code before it is fetched and executed. If any malware or compromised code has been inserted in the iLO 5 firmware, the silicon will detect that, because any infected firmware code will not match-up with the hash burned into the silicon. From there, the iLO 5 firmware validates the rest of the server firmware, namely the UEFI, CPLD, IE, and ME. The UEFI then validates the connection to the operating system, thus completing a complete root, or chain, that is anchored into the silicon.

During operation of the server, HPE has a new technology that conducts run-time firmware validation that checks the firmware stored in the server. At any point, if compromised code or malware is inserted in any of the critical firmware, an iLO audit log alert is created to notify the customer that a compromised has

---

### Standard Features

occurred.

In the unlikely event of a breach into the HPE server firmware, after detection has been completed, the customer may then securely recover the firmware automatically to a previous known good state. HPE provides this function through HPE iLO Advanced license..

---

### Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:  
<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

---

### Optional Features

#### Server Management

##### HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

---

##### HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

---

##### HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

---

##### HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

---

#### GPGPU Information

HPE NVIDIA Quadro P2000 Graphics Accelerator

---

#### Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We have reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support

---

### Optional Features

higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so you're critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We have got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

---

### One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

---



### Service and Support

#### HPE Pointnext - Service and Support

#### Protect your business beyond warranty with HPE Pointnext Operational Service

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. Hewlett Packard Enterprise is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

---

#### Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support.

**NOTE:**<sup>1</sup> IDC

**NOTE:**<sup>2</sup> - HPE CSC reports 2014 - 2015

Learn more about getting connected at <http://www.hpe.com/services/getconnected>.

---

#### Recommended Services

##### HPE Proactive Care\* with 6 hour call-to-repair commitment, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years' proactive reporting and advice with our highest level of hardware support - the HPE 24x7, six hour hardware call-to-repair. Hewlett Packard Enterprise is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

---

##### HPE Proactive Care\* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive

---

### Service and Support

reports with recommendations and advice. This Service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

---

### HPE Proactive Care\* - Next Business Day service, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years of Hardware Support where an Hewlett Packard Enterprise authorized representative will arrive at the Customer's site during the onsite coverage window to begin hardware maintenance service the next coverage day after the service request has been logged. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

**NOTE:**\*HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

---

### Other related Services

#### HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

---

#### HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

---

#### HPE Datacenter Care service

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services "building blocks." You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with HPE via a single point of accountability for HPE and others' products. For more information, visit

---

### Service and Support

<http://www.hpe.com/services/datacentercare>

---

#### **HPE GreenLake Flex Capacity**

With HPE GreenLake Flex Capacity, you get the speed, scalability, and economics of the public cloud in the privacy of your data center. Gain the advantages of the public cloud-consumption-based payment, rapid scalability without worrying about capacity constraints. Reduce the "heavy lifting" needed to operate a data center. And retain the advantages that IT provides the business (i.e., control, security). Deliver the right user experience, choose the right technology for the business, manage privacy and compliance, and manage the cost of IT. And, you have the option to use the public cloud when needed.

---

#### **DC for Hyperscale**

Datacenter Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

---

#### **HPE Factory Express for Servers and storage**

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

---

#### **HPE Service Credits**

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

---

#### **HPE Education Services**

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

---

### Service and Support

#### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. Learn more

<http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement. For more information:

<http://www.hpe.com/services>.

**NOTE:** \*HPE Support Center Mobile App is subject to local availability.

**NOTE:** HPE ProLiant DX560 Gen10 Server is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

---

#### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

---

### Configuration Information

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

<b>Step 1: Base Configuration (choose one of the following configurable models)</b>		
<b>SKU Number</b>	HPE ProLiant DL560 Gen10 24SFF Configure-to-order Server	P22006-B21
<b>Chipset</b>	Intel® C621 Chipset	
<b>Processor</b>	2U Server Chassis with 2 processor slots available; 4 processor configuration would require optional HPE  ProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21)  <b>NOTE:</b> If 2 <sup>nd</sup> generation Intel® Xeon® Scalable processors are being used (82xx, 62xx or 52xx series) the 4 processor configuration would require optional HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21)	
<b>DIMM Slots</b>	24 DIMM slots for RDIMM, LRDIMM DDR4 Memory; (6 DIMM slots per processor can be used for NVDIMMs or can be used for HPE Persistent Memory)  48 DIMM configuration would require optional HPE  ProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and 4 processors  <b>NOTE:</b> If 2 <sup>nd</sup> generation Intel® Xeon® Scalable processors are being used (82xx, 62xx or 52xx series) the 48 DIMM configuration would require optional HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21)	
<b>Network Controller</b>	None. FlexibleLOM slot (various options can be chosen for networking; NIC cards also available via expansion slots)	
<b>Storage Controller</b>	1 x HPE Smart Array E208i-a SR Gen10 Controller  2 x HPE Smart Array E208i-p SR Gen10 Controller	
<b>PCIe</b>	3 PCIe 3.0 slots (8 PCIe 3.0 slots are available if second processor is chosen and a Secondary and Tertiary Riser Kits has been installed)	
<b>Drive Cage - included</b>	24 SFF	
<b>Fans</b>	6 hot plug fans, redundant	
<b>Management</b>	HPE iLO Standard with Intelligent Provisioning and (Standard); HPE OneView Standard (requires download) and HPE iLO Advanced, HPE OneView Advanced (require additional licenses)	
<b>microSD Slots</b>	1 microSD card slot (internal)	
<b>TPM Connector</b>	1 Trusted Platform Module (TPM) connector	
<b>UEFI</b>	BIOS Legacy mode (field configurable) or Unified Extensible Firmware Interface (UEFI) mode (default)	
<b>USB</b>	7 USB ports (2 USB 2.0 and 5 USB 3.0)	
<b>Video Ports</b>	2 video ports (1 front optional via the Universal Media Kit upgrade option, 1 rear)	
<b>Rails</b>	Easy install rails and cable management arm are optional	

### Configuration Information

**NOTE:** Trade Agreement Act (TAA) and means that these SKUs are manufactured in countries that are part of the global trade act. This provides greater security assurance that these servers come from countries that signed the agreement act. This is particularly important to HPE customers in our federal sector and other verticals that have concerns about the country of origin for our solutions.

**NOTE:** TAA servers are only orderable in North America and Canada.

**NOTE:** PCIe slot availability is dependent on the number of processors and riser kits installed. Please refer to the "Expansion slots" section for more details.

**NOTE:** For the DL560 Gen10, the number of processors can be one, two or four installed.

**NOTE:** For four processors, the HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) is required if 1st generation Intel® Xeon® Scalable processors are being used

**NOTE:** For four processors, the HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21) is required if 2nd generation Intel® Xeon® Scalable processors are being used.

**NOTE:** This applies to CTO configurations, field upgrades may differ depending on field configuration.

### Step 2a: Choose Processor Options

#### Processor Option Kits (Required Processor)

##### 2<sup>nd</sup> Intel Xeon-Platinum

Description	SKU
HPE DX560 Gen10 Intel Xeon-Platinum 8280M (2.7GHz/28-core/205W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22943-L21
HPE DX560 Gen10 Intel Xeon-Platinum 8280 (2.7GHz/28-core/205W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22942-L21
HPE DX560 Gen10 Intel Xeon-Platinum 8276M (2.2GHz/28-core/165W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22941-L21
HPE DX560 Gen10 Intel Xeon-Platinum 8276 (2.2GHz/28-core/165W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22940-L21
HPE DX560 Gen10 Intel Xeon-Platinum 8270 (2.7GHz/26-core/205W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22939-L21
HPE DX560 Gen10 Intel Xeon-Platinum 8268 (2.9GHz/24-core/205W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22938-L21
HPE DX560 Gen10 Intel Xeon-Platinum 8260M (2.4GHz/24-core/165W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22937-L21
HPE DX560 Gen10 Intel Xeon-Platinum 8260 (2.4GHz/24-core/165W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22936-L21
HPE DX560 Gen10 Intel Xeon-Platinum 8253 (2.2GHz/16-core/125W) FIO Processor Kit	P22934-L21
<b>Intel Xeon-Gold</b>	
HPE DX560 Gen10 Intel Xeon-Gold 6254 (3.1GHz/18-core/200W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22932-L21
HPE DX560 Gen10 Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) FIO Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P22931-L21
HPE DX560 Gen10 Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) FIO Processor Kit	P22930-L21



### Configuration Information

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6246 (3.3GHz/12-core/165W) Processor Kit P22929-L21

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) FIO Processor Kit P22928-L21

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) FIO Processor Kit P22927-L21

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6240M (2.6GHz/18-core/150W) FIO Processor Kit P22926-L21

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) FIO Processor Kit P22925-L21

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6238M (2.1GHz/22-core/140W) FIO Processor Kit P22924-L21

**NOTE:** Ships with Performance Heatsink.

<b>Description</b>	<b>SKU</b>
--------------------	------------

HPE DX560 Gen10 Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) FIO Processor Kit	P22923-L21
--	------------

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) FIO Processor Kit	P22922-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) FIO Processor Kit	P22920-L21
--	------------

**NOTE:** Ships with Performance Heatsink.

HPE DX560 Gen10 Intel Xeon-Gold 6222V (1.8GHz/20-core/115W) FIO Processor Kit	P22918-L21
---	------------

HPE DX560 Gen10 Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) FIO Processor Kit	P22919-L21
--	------------

### Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to:

<https://www.hpe.com/docs/memory-population-rules>

For Gen10 memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>

**NOTE:** The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.

**NOTE:** DDR4-2933 Memory Kits are only supported with 2nd Generation Intel Xeon Scalable Series Processors. Only one of the following from each list unless otherwise noted

### Registered DIMMs (RDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series

HPE DX 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory FIO Kit	P18448-B21
--	------------

- Standalone: P00920-B21

HPE DX 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory FIO Kit	P18449-B21
--	------------

- Standalone: P00922-B21

### Configuration Information

HPE DX 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory FIO Kit	P18450-B21
<ul style="list-style-type: none"> <li>Standalone: P00924-B21</li> </ul>	
HPE DX 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory FIO Kit	P18453-B21
<ul style="list-style-type: none"> <li>Standalone: P00930-B21</li> </ul>	
<b>Load Reduced DIMMs (LRDIMMs)</b>	
HPE DX 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory FIO Kit	P18451-B21
<ul style="list-style-type: none"> <li>Standalone: P00926-B21</li> </ul>	
HPE DX 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-24-21-21 Load Reduced Smart Memory Kit	P18454-B21
<ul style="list-style-type: none"> <li>Standalone: P11040-B21</li> </ul>	
HPE DX 128GB (1x128GB) Octal Rank x4 DDR4-2933 CAS-24-21-21 Load Reduced 3DS Smart Memory FIO Kit	P18452-B21
<ul style="list-style-type: none"> <li>Standalone: P00928-B21</li> </ul>	

### Step 2c: Choose Power Supplies

Only one or more of the following from each list unless otherwise noted

#### HPE Flex Slot Power Supplies

Description	SKU
HPE DX 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE DX 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE DX 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE DX 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE DX 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21

**NOTE:** Select one or more power supplies. For 800W, 4 power supplies need to be selected.

**NOTE:** 1600W Power supplies only support high line voltage (200VAC to 240VAC).

**NOTE:** 800W Titanium power supplies support high line voltage (200VAC to 240VAC)

**NOTE:** Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

<http://www.hpe.com/info/hppoweradvisor>.

**NOTE:** All power supplies in a server should match. Mixing Power Supplies is not supported.

**NOTE:** HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.

### Step 2d: Choose network adapters

Only one of the following from each list unless otherwise noted

#### Network Adapters

HPE DX Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
---	------------

### Configuration Information

<ul style="list-style-type: none"> <li>• Standalone: 811546-B21</li> </ul>	
HPE DX Ethernet 1Gb 4-port 366T FIO Adptr	P18461-B21
<ul style="list-style-type: none"> <li>• Standalone: 665240-B21 811546-B21</li> </ul>	
HPE DX Ethernet 10Gb 2-port 562FLR-SFP+ Adapter	727054-B21
HPE DX Ethernet 10Gb 2-port 562SFP+ FIO Adptr	P18455-B21
<ul style="list-style-type: none"> <li>• Standalone: 727055-B21</li> </ul>	
HPE DX Ethernet 10Gb 2-port 562FLR-T Adapter	817745-B21
HPE DX Ethernet 10Gb 2-port 562T FIO Adptr	P18456-B21
Standalone: 817738-B21	
HPE DX Ethernet 10/25Gb 2-port 640FLR-SFP28 FIO Adapter	P18461-B21
<ul style="list-style-type: none"> <li>• Standalone: 817749-B21</li> </ul>	
HPE DX Ethernet 10/25Gb 2-port 640SFP28 FIO Adapter	P18462-B21
<ul style="list-style-type: none"> <li>• Standalone: 817753-B21</li> </ul>	

### Step 3: Choose Additional Factory Integratable Options

Only one of the following from each list unless otherwise noted

#### Risers

HPE DL560 Gen10 4-port 8 NVMe Slimline FIO Riser Kit	876242-B21
HPE DL560 Gen10 x8/x8/x8 1-port 2 NVMe Slimline FIO Riser Kit	876245-B21
HPE DL38X Gen10 x16/x16 GPU Slot2/3 FIO Riser Kit	871676-B21

**NOTE:** For additional details on ProLiant DL Gen10 server risers please visit:  
<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>

#### HPE OneView

##### Description

	SKU
HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A

##### BIOS Mode

HPE Legacy FIO Mode Setting	758959-B22
-----------------------------	------------

**NOTE:** Selecting this option will change the UEFI BIOS setting into Legacy BIOS Setting.

##### Controller State

HPE FIO Enable Smart Array SW RAID	784308-B21
------------------------------------	------------

**NOTE:** If not selecting an HPE Storage Controller, this option may be selected to support RAID and Hot-plug capabilities for SATA hard drives. The S100i does not support SAS hard drives.

### Step 4: Choose Additional Options for Factory Integration from Core and additional Options sections below

### Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

#### HPE Processors

##### Intel Xeon-Platinum

Description	SKU
HPE DL560 Gen10 Intel Xeon-Platinum 8280L (2.7GHz/28-core/205W) Processor Kit <b>NOTE: Ships with Performance Heatsink</b>	P07154-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8280M (2.7GHz/28-core/205W) Processor Kit <b>NOTE: Ships with Performance Heatsink</b>	P03008-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8280 (2.7GHz/28-core/205W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02984-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8276L (2.2GHz/28-core/165W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P07153-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8276M (2.2GHz/28-core/165W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P03018-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8276 (2.2GHz/28-core/165W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02958-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8270 (2.7GHz/26-core/205W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02979-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8268 (2.9GHz/24-core/205W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02985-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8260 (2.4GHz/24-core/165W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02959-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8260Y (2.4GHz/24-20-16-core/165W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P03023-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8256 (3.8GHz/4-core/105W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02976-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8253 (2.2GHz/16-core/125W) Processor Kit	P03007-B21
HPE DL560 Gen10 Intel Xeon-Platinum 8180M (2.5GHz/28-core/205W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	875335-B21
<b>Intel Xeon-Gold</b>	
HPE DL560 Gen10 Intel Xeon-Gold 6254 (3.1GHz/18-core/200W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02986-B21
HPE DL560 Gen10 Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02962-B21
HPE DL560 Gen10 Intel Xeon-Gold 6252N (2.3GHz/24-core/150W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02960-B21
HPE DL560 Gen10 Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P02961-B21
HPE DL560 Gen10 Intel Xeon-Gold 6246 (3.3GHz/12-core/165W) Processor Kit <b>NOTE: Ships with Performance Heatsink.</b>	P15170-B21

### Core Options

Description	SKU
HPE DL560 Gen10 Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P02988-B21
HPE DL560 Gen10 Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P02989-B21
HPE DL560 Gen10 Intel Xeon-Gold 6240L (2.6GHz/18-core/150W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P11949-B21
HPE DL560 Gen10 Intel Xeon-Gold 6240M (2.6GHz/18-core/150W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P11947-B21
HPE DL560 Gen10 Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P02963-B21
HPE DL560 Gen10 Intel Xeon-Gold 6238L (2.1GHz/22-core/140W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P11948-B21
HPE DL560 Gen10 Intel Xeon-Gold 6238M (2.1GHz/22-core/140W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P11946-B21
HPE DL560 Gen10 Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P03005-B21
HPE DL560 Gen10 Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P03006-B21
HPE DL560 Gen10 Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P02965-B21
HPE DL560 Gen10 Intel Xeon-Gold 6230N (2.3GHz/20-core/125W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P02987-B21
HPE DL560 Gen10 Intel Xeon-Gold 6262V (1.9GHz/24-core/135W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P02977-B21
HPE DL560 Gen10 Intel Xeon-Gold 6222V (1.8GHz/20-core/115W) Processor Kit	P02980-B21
HPE DL560 Gen10 Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) Processor Kit	P02981-B21
HPE DL560 Gen10 Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) Processor Kit <b>NOTE:</b> Ships with Performance Heatsink.	P02982-B21
HPE DL560 Gen10 Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) Processor Kit	P02983-B21
HPE DL560 Gen10 Intel Xeon-Gold 5220S (2.7GHz/18-core/125W) Processor Kit	P11945-B21
HPE DL560 Gen10 Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) Processor Kit	P02978-B21
HPE DL560 Gen10 Intel Xeon-Gold 5218B (2.3GHz/16-core/125W) Processor Kit	P12573-B21
HPE DL560 Gen10 Intel Xeon-Gold 5218N (2.3GHz/16-core/110W) Processor Kit	P02964-B21
HPE DL560 Gen10 Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) Processor Kit	P07147-B21
HPE DL560 Gen10 Intel Xeon-Gold 5215L (2.5GHz/10-core/85W) Processor Kit	P07150-B21
HPE DL560 Gen10 Intel Xeon-Gold 5215M (2.5GHz/10-core/85W) Processor Kit	P07148-B21
HPE DL560 Gen10 Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) Processor Kit <b>NOTE:</b> If more than one processor is desired select one xxxxxx-L21 and one or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.	P03024-B21
<b>NOTE:</b> Mixing of 1 <sup>st</sup> and 2 <sup>nd</sup> generation Intel® Xeon® Scalable processors - (8/6/5)1xx and (8/6/5)2xx models -is not supported	

### Core Options

#### Memory Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends memory from the list located here:

<http://www.hpe.com/products/recommend>.

Best product availability is limited to US, Canada, and Latin America at this time.

#### HPE Memory

Hewlett Packard Enterprise memory from previous generation servers is not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server.

#### Registered DIMMs (RDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series

Description	SKU
HPE DX 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory FIO Kit	P18448-B21
<ul style="list-style-type: none"> <li>Standalone: P00920-B21</li> </ul>	
HPE DX 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory FIO Kit	P18449-B21
<ul style="list-style-type: none"> <li>Standalone: P00922-B21</li> </ul>	
HPE DX 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory FIO Kit	P18450-B21
<ul style="list-style-type: none"> <li>Standalone: P00924-B21</li> </ul>	
HPE DX 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory FIO Kit	P18453-B21
<ul style="list-style-type: none"> <li>Standalone: P00930-B21</li> </ul>	
<b>Load Reduced DIMMs (LRDIMMs)</b>	P00930-B21
HPE DX 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory FIO Kit	P18451-B21
<ul style="list-style-type: none"> <li>Standalone: P00926-B21</li> </ul>	
HPE DX 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-24-21-21 Load Reduced Smart Memory Kit	P18454-B21
<ul style="list-style-type: none"> <li>Standalone: P11040-B21</li> </ul>	
HPE DX 128GB (1x128GB) Octal Rank x4 DDR4-2933 CAS-24-21-21 Load Reduced 3DS Smart Memory FIO Kit	P18452-B21
<ul style="list-style-type: none"> <li>Standalone: P00928-B21</li> </ul>	

#### HPE Drives

The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

#### Enterprise - 12G SAS - SFF Drives

HPE DX 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	P17956-B21
---	------------



### Core Options

- Standalone: 881457-B21

### Midline - 12G SAS - SFF Drives

HPE DX 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD

P22713-B21

- Standalone: 765466-B21

### SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability,

HPE recommends SSDs from the list located here: <http://www.hpe.com/products/recommend>.

### Read Intensive - 6G SATA - SFF - Solid State Drives

#### Description

#### SKU

HPE DX 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P19133-B21

- Standalone: P05946-B21

HPE DX 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P18736-B21

- Standalone: P04570-B21

**NOTE:** Multi-vendor SKUs are composed of numerous supplier manufactured SSDs within a given SATA capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has meet or exceeded the HPE qualification standards published above.

### Read Intensive - 12G SAS - SFF - Solid State Drives

HPE DX 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P22554-B21

- Standalone: P04523-B21

### Mixed Use - 12G SAS - SFF - Solid State Drives

HPE DX 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P18056-B21

- Standalone: P04527-B21

HPE DX 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P18057-B21

- Standalone: P04533-B21

### Mixed Use - 6G SATA - SFF - Solid State Drives

HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P17973-B21

- Standalone: P05980-B21

HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P17968-B21

- Standalone: P09716-B21

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P18054-B21

- Standalone: P05986-B21

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD

P17969-B21

- Standalone: P09722-B21

**NOTE:** Multi-vendor SKUs are composed of numerous supplier manufactured SSDs within a given SATA capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has meet or exceeded the HPE qualification standards published above.

### Core Options

#### HPE Networking

##### 25 Gigabit Ethernet adapters

###### Description

###### SKU

HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter

817753-B21

- Standalone: 817753-B21

##### 10 Gigabit Ethernet adapters

HPE DX Ethernet 10Gb 2-port 562SFP+ FIO Adapter

727055-B21

- Standalone: 727055-B21

HPE DX Ethernet 10Gb 2-port 562T FIO Adapter

817738-B21

- Standalone: 817738-B21

**NOTE:** A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

**NOTE:** Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

##### 1 Gigabit Ethernet adapters

HPE DX Ethernet 1Gb 4-port 366T FIO Adapter

P18460-B21

- Standalone: 811546-B21

##### FlexibleLOM Adapters

HPE DX Ethernet 1Gb 4-port 366FLR FIO Adapter

P18459-B21

- Standalone: 665240-B210

HPE DX Ethernet 10Gb 2-port 562FLR-SFP+ FIO Adapter

P18457-B21

- Standalone: 727054-B21

HPE DX Ethernet 10Gb 2-port 562FLR-T FIO Adapter

P18458-B21

- Standalone: 817745-B21

HPE DX Ethernet 10/25Gb 2-port 640FLR-SFP28 FIO Adapter

P18461-B21

- Standalone: 817749-B21

**NOTE:** Please see the NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

#### HPE I/O Expansion Options

HPE DX DL560 Gen10 x8/x8 Tertiary Riser FIO Kit

P21959-B21

- Standalone: 872253-B21

HPE DX DL Gen10 x8/x16/x8 Riser FIO Kit

P17803-B21

- Standalone: 870548-B21

### Core Options

#### HPE Power Supplies

<b>Description</b>	<b>SKU</b>
--------------------	------------

HPE DX 1600W Flex Slot Platinum Hot Plug Low Halogen FIO Power Supply Kit	P18222-B21
---	------------

- Standalone: 830272-B21

**NOTE:** Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

**NOTE:** 1600W Power supplies only support high line voltage (200VAC to 240VAC).

HPE 800W Flex Slot Platinum Hot Plug Low Halogen FIO Power Supply Kit	P18223-B21
---	------------

- Standalone: 865414-B21

**NOTE:** Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Titanium Hot Plug Low Halogen FIO Power Supply Kit	P18224-B21
---	------------

- Standalone: 865438-B21

**NOTE:** 800W Titanium power supplies support high line voltage (200VAC to 240VAC).

**NOTE:** Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector

HPE 800W Flex Slot Universal Hot Plug Low Halogen Power FIO Supply Kit	P18225-B21
--	------------

- Standalone: 865428-B21

**NOTE:** Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.

**NOTE:** Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

<http://www.hpe.com/info/hppoweradvisor>.

**NOTE:** All power supplies in a server should match. Mixing Power Supplies is not supported.

**NOTE:** Option kits contain the specified power supply and a PDU IEC cable.

**NOTE:** 1600W power supplies only support high line voltage.

**NOTE:** HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional HPE power cords.

GPGPU information							
Part number	Card	Qty support	Processor support	PCIe speed	8/16/24 SFF	Max. 8 NVMe	Greater than 8 NVMe
Q0V77A	NVIDIA Quadro P2000 GPU Module	2	All	Gen3	35C	35C	30C

### Core Options

---

**NOTE:** Check the power usage via the HPE Power Advisor Tool located at <http://www.hpe.com/info/hppoweradvisor>.

**NOTE:** A maximum of 2 GPU cards can be supported, 1 in primary riser expansion slot 2 and another in secondary riser expansion slot 5. Refer Expansion Slots sections for additional details on risers.

---

### Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

#### iLO Advanced

Description	SKU
HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21

#### HPE Converged Infrastructure Management Software

HPE OneView Physical Media Kit LTU	E5Y37A
------------------------------------	--------

#### HPE OneView Advanced (with HPE iLO Advanced)

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
--	--------

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
--	----------

HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A
--	--------

#### HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
---	--------

HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
---	--------

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
--	----------

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
---	--------

**NOTE:** Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>

**NOTE:** Electronic and flexible-quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Please see the [HPE OneView QuickSpecs](#) for technical specifications and additional information.

#### HPE PCIe Workload Accelerator Options

##### HPE Mixed Use PCIe Workload Accelerator

HPE 1.6TB NVMe x8 Lanes Mixed Use HHHH 3yr Wty Digitally Signed Firmware Card	P10264-B21
---	------------

HPE 6.4TB NVMe x8 Lanes Mixed Use HHHH 3yr Wty Digitally Signed Firmware Card	P10268-B21
---	------------

HPE 3.2TB NVMe x8 Lanes Mixed Use HHHH 3yr Wty Digitally Signed Firmware Card	P10266-B21
---	------------

##### HPE Write Intensive PCIe Workload Accelerator

HPE 750GB PCIe x4 Lanes Write Intensive HHHH 3yr Wty Digitally Signed Firmware Card	878038-B21
---	------------

**NOTE:** Please see the [HPE PCIe Workload Accelerators for ProLiant Servers QuickSpecs](#) for Technical Specifications and additional information.

### Additional Options

#### HPE Security

##### Description

SKU


HPE Trusted Platform Module 2.0 Gen10 Option

864279-B21

**NOTE:** HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen9 servers or earlier generation variants. HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

#### HPE Smart Array Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

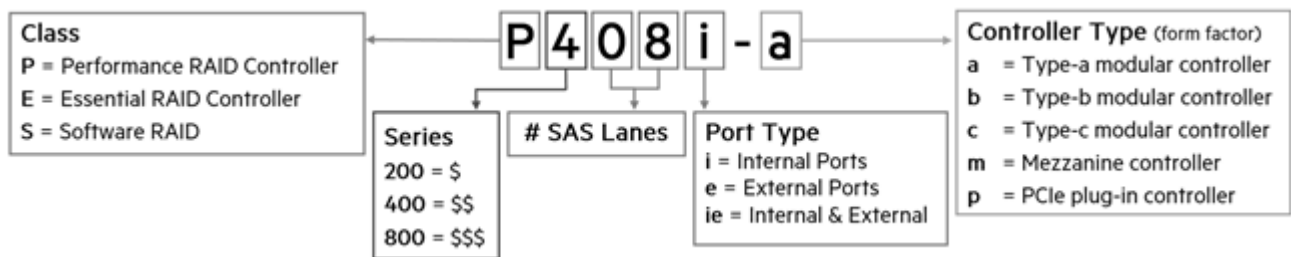

#### Performance RAID Controllers

**NOTE:** All performance RAID controllers are supported by either the HPE Smart Storage Battery (P01366-B21) or the HPE Smart Storage Hybrid Capacitor (P02377-B21), which support multiple devices and are sold separately.

HPE Smart Array P816i-a SR Gen10 (16 Int Lanes/4GB Cache/SmartCache) 12G SAS Modular LH Controller 869083-B21

**NOTE:** Does not occupy a PCIe expansion slot.

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller 869081-B21

**NOTE:** Does not occupy a PCIe expansion slot.

HPE Smart Array P824i-p MR Gen10 (24 Internal Lanes/4GB Cache/CacheCade) 12G SAS PCIe Controller 870658-B21

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller 830824-B21

HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller 804405-B21

#### Essential RAID Controllers

HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular LH Controller 869079-B21

### Additional Options

**NOTE:** Does not occupy a PCIe expansion slot.

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804394-B21
--	------------

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804398-B21
--	------------

#### Optional Software

HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU	Q2F26AAE
---	----------

HPE Smart Array SR SmartCache (Single Key/Single Server) LTU	D7S26A
--	--------

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) LTU	D7S27A
---	--------

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) E-LTU	D7S27AAE
---	----------

**NOTE:** SmartCache is offered on HPE Smart Array performance RAID controllers and comes standard (no licensing is required) if the HPE Smart Array P816i-a SR Gen10 LH Controller is installed in the server.

### Optional Upgrades

Description	SKU
-------------	-----

HPE 96W Smart Storage Battery (up to 20 Devices) with 145mm Cable Kit	P01366-B21
---	------------

**NOTE:** Provides backup power for multiple HPE Smart Array controllers or other devices. Is required with performance RAID controllers and NVDIMMs.

### HPE Rack Options

Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

#### Rail Kits

HPE 2U Large Form Factor Easy Install Rail Kit	733662-B21
--	------------

**NOTE:** Does not include CMA (733664-B21).

HPE 2U Cable Management Arm for Easy Install Rail Kit	733664-B21
---	------------

HPE 2U Large Form Factor Ball Bearing Rail Kit	720864-B21
--	------------

**NOTE:** Does not include CMA (720865-B21).

HPE 2U Cable Management Arm for Ball Bearing Rail Kit	720865-B21
---	------------


**NOTE:** Rail kits are optional for DL560 Gen10 and are no longer included standard with the server. Customers have the option to purchase their server without a rail kit.

**NOTE:** Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

**NOTE:** Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.



### Memory

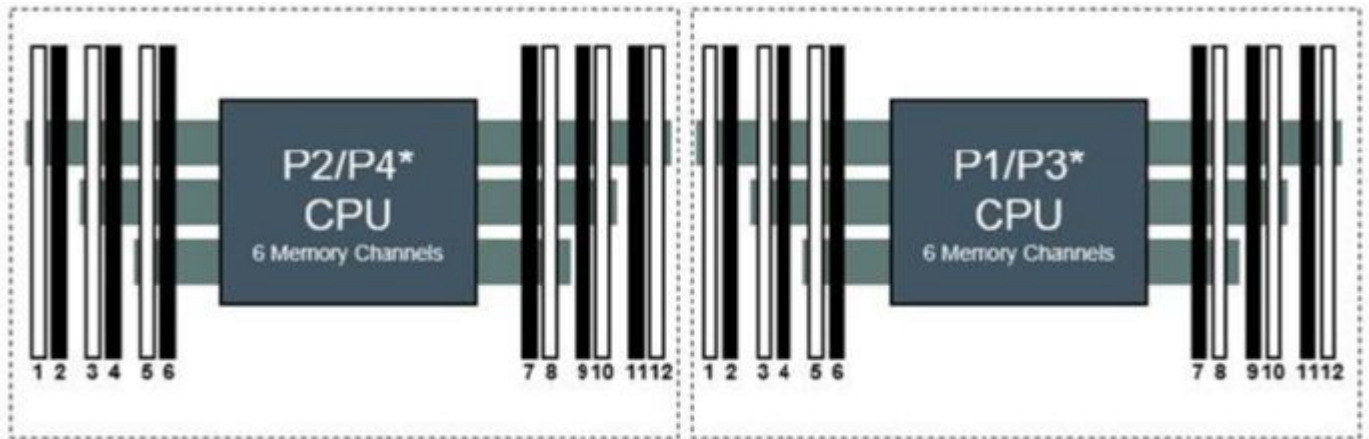

HPE ProLiant Gen10 DL360/ DL380/ DL560\* Servers

2 Slots per Channel

**NOTE:**\*HPE ProLiant DL560 is a 4 socket server (uses P3, P4)

HPE ProLiant Gen10 12 slot per CPU DIMM Population Order											
1 DIMM										8	
2 DIMMs									8	10	
3 DIMMs									8	10	12
4 DIMMs			3		5				8	10	
5 DIMMs*			3		5				8	10	12
6 DIMMs	1		3		5				8	10	12
7 DIMMs*	1		3		5		7		8	10	12
8 DIMMs			3	4	5	6	7	8	9	10	
9 DIMMs*	1		3		5		7	8	9	10	11
10 DIMMs*	1		3	4	5	6	7	8	9	10	12
11 DIMMs*	1		3	4	5	6	7	8	9	10	11
12 DIMMs	1	2	3	4	5	6	7	8	9	10	11

\* Unbalanced, not recommended  
Memory Population guidelines

#### General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest



### Memory

DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.

For details on the HPE Server Memory Options Population Rules, visit:

<http://www.hpe.com/docs/memory-population-rules>

To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required. For additional information, please see the [HPE DDR4 SmartMemory QuickSpecs](#).

### HPE 16GB NVDIMM for Gen10 Servers - Population Rules and Guidelines:

Maximum of (12) 16GB NVDIMMs for 2 socket servers and (24) 16GB NVDIMMs for 4 socket servers.

If NVDIMM-N interleaving is disabled, then any number of NVDIMM-Ns may be used, and the NVDIMM-Ns should be populated in this order:

- Choose a CPU with open slots (based on NUMA proximity), if any.
- Pick a channel with two open slots, if any. This keeps the NVDIMM-N from sharing bandwidth with regular memory. Populate the white slot.
- Pick a channel with an open slot that already has an NVDIMM-N rather than a regular DIMM, if any. This slot must be a black slot. Keep NVDIMM-N traffic away from regular DIMM traffic.

If NVDIMM-N interleaving is enabled, then the same interleaving balance restrictions that applied to regular DIMMs also apply to the NVDIMM-Ns using the remaining open slots. When assigning the NVDIMM-Ns to those open channels per the regular DIMM placement rules:

- It's important to keep the same number of DIMMs on the same memory controller.
- Choose the number of NVDIMM-Ns per CPU based on desired block device size and NUMA locality.
- Pick a memory controller with a channel with two open slots, if any.
- Pick a channel with two open slots, if any. This keeps the NVDIMM-N from sharing bandwidth with regular memory. Populate the white slot.

Please visit the [HPE Server Memory Options Population Rules](#) for detailed configuration rules and best practices.

### Memory Speed Table for HPE ProLiant DL560 Gen 10

For the HPE Server Memory speed table, please visit: <https://www.hpe.com/docs/memory-speed-table>

### Standard and Maximum Memory Capacity (Pre-configured Models)

Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
5120	32 GB (2 x 16 GB)	384 GB (24 x 16 GB)	6144GB (48 x 128 GB)
6130	64 GB (4 x 16 GB)	384 GB (24 x 16 GB)	6144GB (48 x 128 GB)
6148	128 GB (8 x 16 GB)	768 GB (48 x 16 GB)	6144GB (48 x 128 GB)
8170	256 GB (16 x 16 GB)	768 GB (48 x 16 GB)	6144GB (48 x 128 GB)
5220	64 GB (2 x 32 GB)	768 GB (24 x 32 GB)	6144GB (48 x 128 GB)
6230	128 GB (4 x 32 GB)	768 GB (24 x 32 GB)	6144GB (48 x 128 GB)
6254	256 GB (8 x 32 GB)	1536 GB (48 x 32 GB)	6144GB (48 x 128 GB)
8268	512 GB (16 x 32 GB)	1536 GB (48 x 32 GB)	6144GB (48 x 128 GB)

## Memory

### DDR4 memory options part number decoder

**NOTE:** Capacity references are rounded to the common gigabyte (GB) values.

- 4 GB = 4,096 MB
- 8 GB = 8,192 MB
- 16 GB = 16,384 MB
- 32 GB = 32,768 MB
- 64 GB = 65,536 MB
- 128 GB = 131,072 MB

For more information on memory, please see the Memory QuickSpecs: [HPE DDR4 SmartMemory](#)

---

### Technical Specifications

#### System Unit

**Dimensions** 8.75cm x 44.54cm x 75.47cm

(H x W x D) (with bezel) 3.44 x 17.54 x 29.71 in

**Weight** 34.12 kg

(approximate) 75.23 lb

Maximum: (all hard drives, power supplies, DIMMs and processors installed)  
18.45 kg

40.67 lb

Minimum: (one processor, one standard heatsink, one air baffle, one hard drive, one power supply, one DIMM, one rail kit with CMA and one primary riser installed)

#### Input Requirements **Rated Input Voltage**

(per power supply) 100 - 127 VAC, 200 - 240 VAC, 240VDC for China Only (800W Platinum PS only)

200 - 240 VAC, 240VDC for China Only (800W Titanium PS only)

200 V to 277 VAC, 380 VDC (800W Universal PS only)

-40 VDC to -72 VDC, -48 VDC nominal input (800W -48VDC PS only)

200 - 240 VAC, 240 VDC for China only (1600W PS Only)

#### **Rated Input Current**

9.4 A (100 VAC), 4.5 A (200 VAC), 3.8 A at 240VDC for China Only (800W Platinum PS only)

4.35 A at 200 VAC 3.62 A at

240 VAC, 3.62 A at 240 VDC for China

Only (800W Titanium PS only)

4.5 A at 200 V AC, 3.2 A at 277 V AC, 2.3 A at 380 VDC - (800W Universal PS only)

26 A at -40 VDC input, 19 A at -48 VDC input, nominal input, 12.4 A at -72 VDC input - (800W -48VDC PS only)

8.7 A at 200 VAC, 7.2 A at 240 VAC - (1600W PS Only)

#### **Rated Input Frequency**

50 to 60 Hz (Not applicable for VDC ranges)

#### **Maximum Rated Input Power**

940 W (100 VAC), 900 W (200VAC), 912 W at 240 VDC for China Only - (800W Platinum PS only)

870 W at 200 VAC, 870 W at 240 VAC, 870 W at 240 VDC for China only - (800W Titanium PS only)

900 W at 200 VAC, 887 W at 277 VAC, 874 W at 380 VDC - (800W Universal PS

### Technical Specifications

only)

936 W at -40 VDC input 912 W at -48 VDC input, nominal input 900 W at -72 VDC input - (800W -48VDC PS only)

1734 W at 200 VAC 1720 W at 240 VAC - (1600W PS Only)

### BTU Rating

#### Maximum

3207 BTU/hr at 100 VAC, 3071 BTU/hr at 200 VAC, 3112 BTU/hr at 240 for China only - (800W Platinum PS only)

2969 BTU/hr at 200 VAC, 2969 BTU/hr at 240 VAC, 2969 BTU/hr at 240 VDC for China only - (800W Titanium PS only)

3071 BTU/hr at 200 VAC, 3026 BTU/hr at 277 VAC, 2982 BTU/hr at 380 VDC - (800W Universal PS only)

3194 BTU/hr at -40 VDC input, 3112 BTU/hr at -48 VDC input (nominal input), 3071 BTU/hr at -72 VDC input - (800W -48VDC PS only)

5918 BTU/hr at 200 VAC, 5884 BTU/hr at 240 VAC - (1600W PS Only)

### Power Supply Output

(per power supply)

#### Rated Steady-State Power

800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only)

800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Titanium PS only)

800 W at 200 VAC to 277 VAC input, 800 W at 380 VDC input - (800W Universal PS only)

800 W at -40 VDC to -72 VDC - (800W -48VDC PS only)

1600 W at 200 VAC to 240 VAC input, 1600 W at 240 VDC input - (1600W PS Only)

#### Maximum Peak Power

800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only)

800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Titanium PS only)

800 W at 200 VAC to 277 VAC input, 800 W at 380 VDC input- (800W Universal PS only)

800 W at -40 VDC to -72 VDC - (800W -48VDC PS only)

2200 W for 1ms (turbo mode) at 200 VAC to 240 VAC input - (1600W PS Only)

**NOTE:** To review typical system power ratings use the HPE Power Advisor which is available online located at url: <http://www.hpe.com/info/hppoweradvisor>.

### Technical Specifications

#### System Inlet Temperature

##### Standard Operating Support

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

##### Extended Ambient Operating Support

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<http://www.hpe.com/servers/ashrae>

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

##### Non-operating

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

#### Relative Humidity

##### Operating

8% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.

##### Non-operating (non-condensing)

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

#### Altitude

##### Operating

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

##### Non-operating

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

### Technical Specifications

#### Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Product Configuration	Entry	Base	Performance
Idle - LWAd	5.0 B	5.1 B	5.1 B
Idle - LpAm	47 dBA	48 dBA	48 dBA
Operating - LWAd	5.3 B	5.7 B	5.6 B
Operating - LpAm	50 dBA	54 dBA	53 dBA

**NOTE:** Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

#### Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

#### HPE Smart Array

For latest information on **HPE Smart Array Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers** please refer to their QuickSpecs. (E208i-a,E208i-p,E208e-p,P408i-a,P408i-p,P408e-p,P816i-a)

#### Environment-friendly Products and Approach- End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

### Summary of Changes

Date	Version History	Action	Description of Change
02-Dec-2019	Version 1	New	NewQuickSpecs



[Sign up for updates](#)

---

© Copyright 2019 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less



a00073550enw - 16498 - Worldwide - V1 - 02-December-2019